
12" Sealed MAX120

Recommended for Flat sub usage only





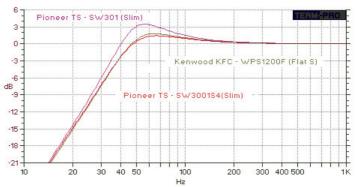

Response chart based on 1.5L driver displacement, For general guidance only.

