


### Features

- Full-range with high power handling capabilities
- Coarse-threaded mounting stud for single-point mounting into almost any material
- Hermetically-sealed design for installation in wet or humid environments

### Applications

- Ideal for behind the wall invisible speakers
- Convert most any substrate into high-quality sound
- Great for outdoor audio applications

### Impedance Plot

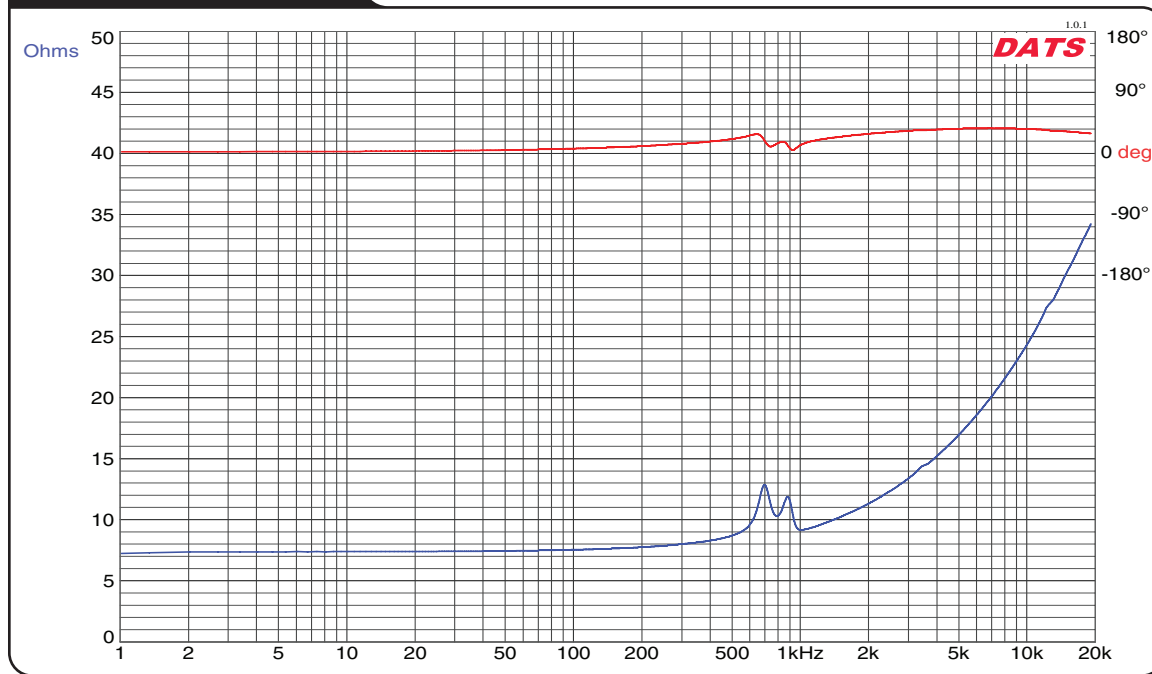

### Parameters

Impedance ( $\Omega$ )	8
Re ( $\Omega$ )	7.46
Le (mH) @ 1 kHz	0.86
Fs (Hz) - Uncoupled	695
Qms	—
Qes	—
Qts	1.52
Mms (g)	38.2
Cms (mm/N)	—
Sd (cm <sup>2</sup> )	—
Vd (cm <sup>3</sup> )	—
BL (Tm)	18.2
VAS (liters)	—
XMAX (mm)	—
VC Diameter (mm)	50
Net Weight (g)	1045
RMS Power Handling (W)	50
Usable Frequency Range (Hz) *	40-15,000