


### FEATURES

- Vented aerodynamic cast aluminium chassis for optimum strength and low compression.
- Proprietary cone material with EGYPTIAN PAPYRUS™ fibres made in-house.
- Soft low damping rubber surround for optimum transient response.
- Advanced BIMAX spider for improved linearity.
- Powerful optimized low distortion neodymium motor system.
- Non-conducting fibre glass voice coil former for minimum damping.
- Extended copper sleeve on pole piece for low inductance and reduced distortion.
- CCAW voice coil for reduced moving mass.
- Long life silver lead wires attached 180° apart for improved stability.
- Vented pole piece and coil former for reduced compression.
- High piston to chassis diameter ratio.
- Gasket and bolt hole protrusions for reduced coupling to speaker cabinet.

### Specs :

Nominal Impedance	8 Ω	Free air resonance, F <sub>s</sub>	29 Hz
DC resistance, R <sub>e</sub>	6.2 Ω	Sensitivity (2.83 V / 1 m)	87.5 dB
Voice coil inductance, L <sub>e</sub>	0.2 mH	Mechanical Q-factor, Q <sub>ms</sub>	4.5
Effective piston area, S <sub>d</sub>	119 cm <sup>2</sup>	Electrical Q-factor, Q <sub>es</sub>	0.35
Voice coil diameter	36 mm	Total Q-factor, Q <sub>ts</sub>	0.33
Voice coil height	17 mm	Moving mass incl.air, M <sub>ms</sub>	12.4 g
Air gap height	5 mm	Force factor, B <sub>l</sub>	6.3 Tm
Linear coil travel (p-p)	12 mm	Equivalent volume, V <sub>as</sub>	48 liters
Magnetic flux density	1.17 T	Compliance, C <sub>ms</sub>	2.4 mm/N
Magnet weight (NEO)	0.13 kg	Mechanical loss, R <sub>ms</sub>	0.5 kg/s
Net weight	1.01 kg	Rated power handling*	60 W

\* IEC 268-5, T/S parameters measured on drive units that are broken in.

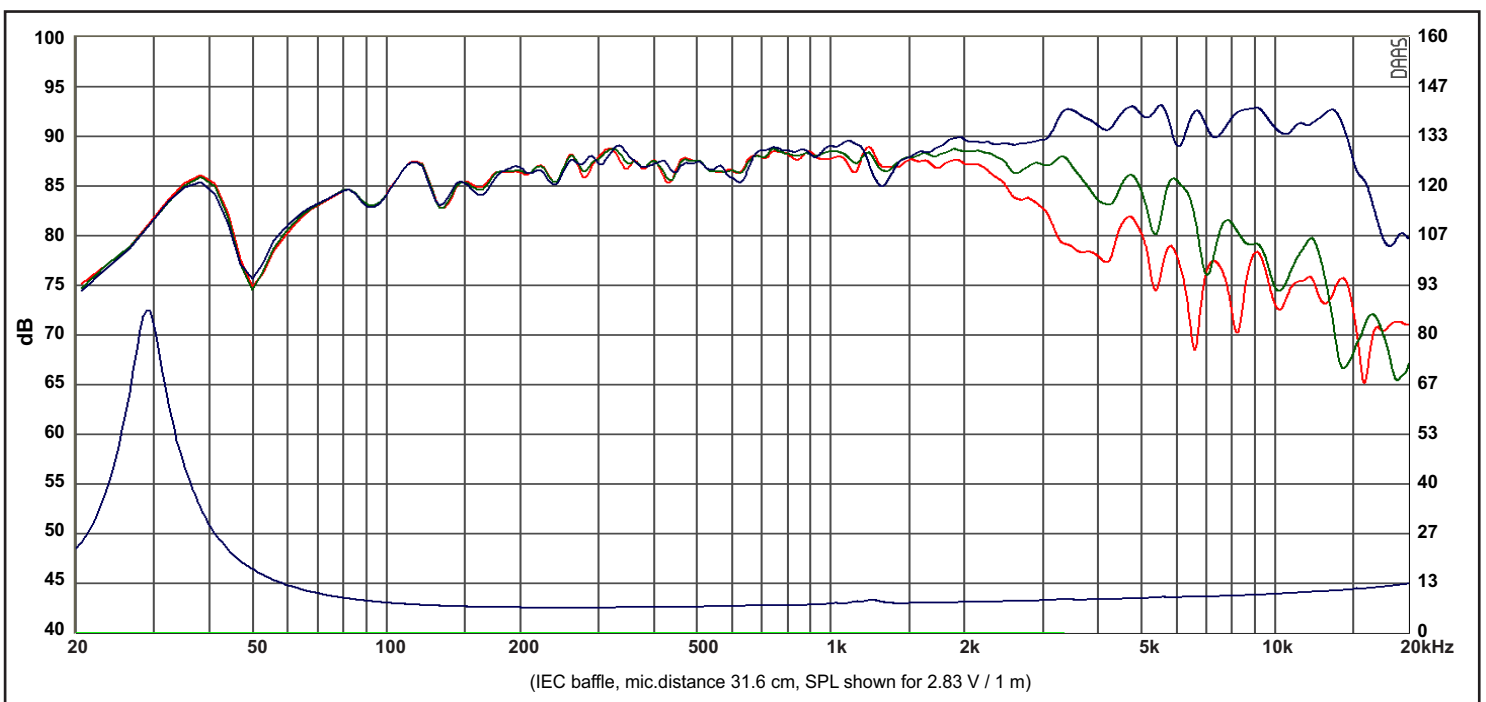

Response Curve :

— (Blue) : on axis      — (Green) : 30° off-axis      — (Red) : 60° off-axis

REV. 2 (28.03.2016)