



CP-259HN

HDMI to HDMI Scaler



Operation Manual



DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from Cypress Technology.

© Copyright 2011 by Cypress Technology.

All Rights Reserved.

Version 1.1 August 2011

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.



SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE DD/MM/YY	SUMMARY OF CHANGE
RDV1	16/07/14	Preliminary Release
VS1	14/11/14	Updated Text/Diagrams

CONTENTS

1. Introduction	1
2. Applications	1
3. Package Contents	1
4. System Requirements	1
5. Features	2
6. Operation Controls and Functions	3
6.1 Front Panel	3
6.2 Rear Panel.....	4
6.3 OSD Menu	5
7. Connection Diagram	7
8. Specifications	8
8.1 Technical Specifications	8
8.2 Input and Output Resolutions.....	9
9. Acronyms	10



1. INTRODUCTION

The HDMI to HDMI Scaler is designed to upscale an HDMI video signal from an HDMI source device and output in a wide range of HDTV and PC resolutions up to 1080p/WUXGA. Additionally this unit can also convert a digital/analog audio signal and then simultaneously output to an HDMI, Optical and 3.5mm Mini-jack (L/R audio) connections. This unit has a comprehensive OSD menu that allows the user to select a variety of output resolutions, allowing the conversion of the video signal to maximize compatibility, and make adjustments to optimize the image quality.

2. APPLICATIONS

- Display an otherwise incompatible HDMI signal on an HDMI display
- Upscale a standard definition video signal for display on a High Definition display
- Lecture room/Showroom/Meeting room/Classroom signal display

3. PACKAGE CONTENTS

- 1×HDMI to HDMI Scaler
- 1×5V/2.6A DC Power Adaptor
- Operation Manual

4. SYSTEM REQUIREMENTS


HDMI source equipment such as a DVD player or set-top box and an HDMI equipped display and audio amplifier.

5. FEATURES

- HDMI, HDCP and DVI compliant
- Supports full range of PC resolution from VGA to WUXGA (RB) and HD resolution from 480i to 1080p
- Automatically detects the display settings of the connected display and outputs the correct resolution and refresh rate when the NATIVE output option is selected
- Supports 50/60Hz frame rate conversion
- Supports 3D motion video adaptive, 3D de-interlacing, and 3:2/2:2 pull-down detection and recovery
- Provides adjustment of contrast, brightness, hue, saturation, sharpness, RGB (color tone) level and aspect ratio size of the video output
- Supports OSD selectable stereo analog and digital audio inputs and simultaneous stereo analog and digital audio outputs to HDMI, Optical digital audio and analog mini-jack connections


6. OPERATION CONTROLS AND FUNCTIONS

6.1 Front Panel

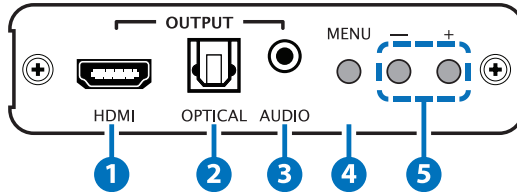

- 1 HDMI OUTPUT:** Connect to a HDMI equipped display or AV receiver for video and audio output.
- 2 OPTICAL OUTPUT:** Connect to an amplifier or active speakers with an optical cable for LPCM 2 channel digital audio output.
- 3 AUDIO OUTPUT:** Connect to an amplifier or active speakers with a 3.5mm mini-jack cable for analog audio output.
- 4 MENU:** Press this button to enter the OSD (On-screen Display) menu and press it again to make a selection.
- 5 Plus (+)/Minus (-):** Press these buttons to:
 - When in the OSD menu*
 - Navigate up/down the OSD menu.
 - To adjust the value of a menu selection.
 - Under normal operation (outside of OSD menu)*
 - Press the "+" button together with the "MENU" button to switch the output resolution to XGA@60 (1024×768).
 - Press the "-" button together with "MENU" button to switch the output resolution to 720p@60.
 - Press both the "+" and "-" buttons at the same time to reset the device to the default settings.

6.2 Rear Panel

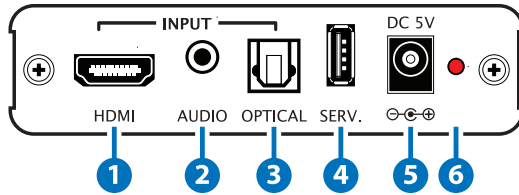

- 1 HDMI INPUT:** Connect to an HDMI source device such as a Blu-ray player or set-top box with an HDMI cable or to a DVI source device such as a PC/Laptop with a DVI to HDMI adaptor.
- 2 AUDIO INPUT:** Connect to the analog audio output of the source device such as a PC/Laptop with a 3.5mm mini-jack cable.
- 3 OPTICAL INPUT:** Connect to the optical digital audio output of the source device such as DVD/Blu-ray player with an optical cable.
- 4 SERV.:** Reserved for firmware update only.
- 5 DC 5V:** Connect the 5V DC power supply to the unit and plug the adaptor into an AC outlet.
- 6 Power LED:** This LED will illuminate once the unit is connected to an active power supply.


6.3 OSD Menu

MAIN MENU	1ST LAYER	2ND LAYER
PICTURE SETTING	CONTRAST	0~100 (50)
	BRIGHTNESS	0~100 (50)
	EXIT	
FINETUNE	HUE	0~100 (50)
	SATURATION	0~100 (50)
	SHARPNESS	0~100 (50)
	NR	OFF, LOW, MIDDLE, HIGH (OFF)
	EXIT	
COLOR SETTING	RED	0~100 (50)
	GREEN	0~100 (50)
	BLUE	0~100 (50)
	EXIT	
OUTPUT SETTING	SIZE	FULL, OVERSCAN, UNDERSCAN, LETTER BOX, PANSCAN, ASPECT (FULL)
	RESOLUTION	640×480@60, 800×600@60, 1024×768@60, 1280×1024@60, 1400×1050@60, 1600×1200@60, 1280×800@60, 1440×900@60, 1680×1050@60, 1920×1200@60RB, 1600×900, 480p, 576p, 720p@50, 720p@60, 1080i@50, 1080i@60, 1080p@50, 1080p@60, NATIVE
	EXIT	

MAIN MENU	1ST LAYER	2ND LAYER
AUDIO SETTING	DELAY	OFF, 40ms, 110ms, 150ms (OFF)
	INPUT	EMBEDDED, ANALOG, OPTICAL (EMBEDDED)
	SOUND	ON, MUTE (ON)
	EXIT	
OSD SETTING	H-POSITION	0~100 (10)
	V-POSITION	0~100 (90)
	TIMER	0~100 (50)
	BACKGROUND	0~100 (50)
	DISPLAY	INFO, ON, OFF (INFO)
	EXIT	
FACTORY RESET		
INFORMATION		
EXIT		

Note: Values in brackets are default for that setting.

7. CONNECTION DIAGRAM

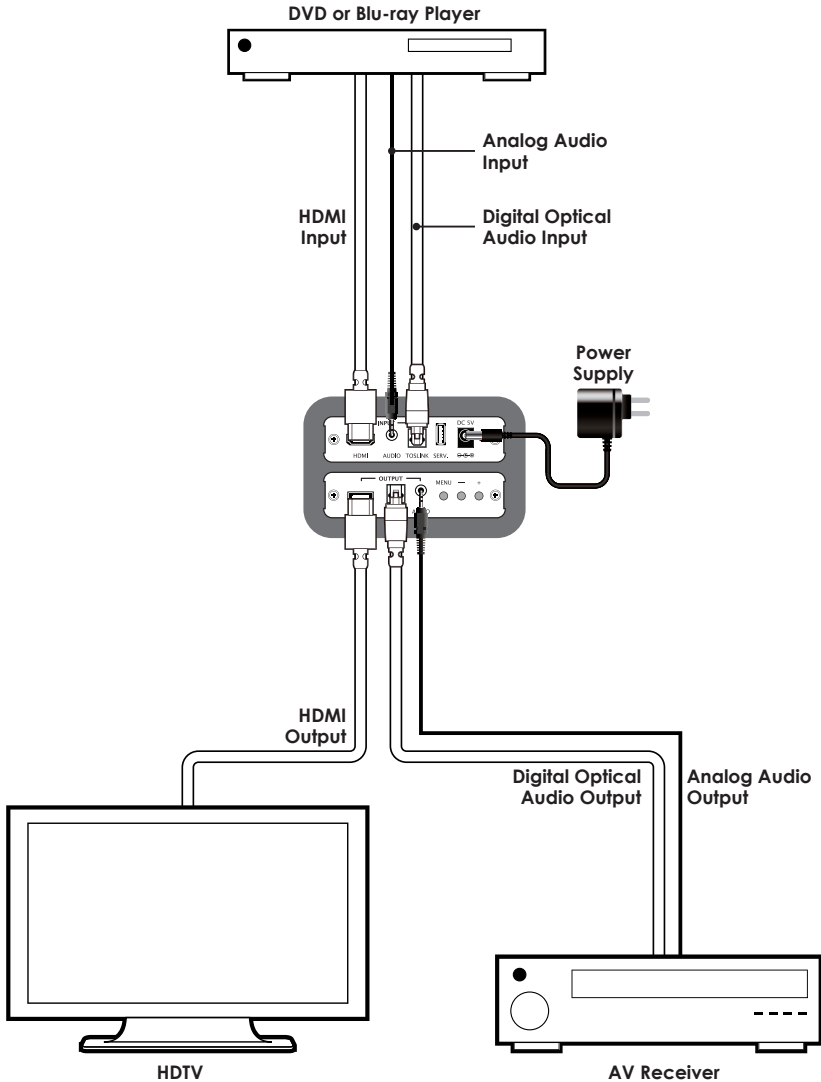

8. SPECIFICATIONS

8.1 Technical Specifications

Video Bandwidth	225MHz/6.75 Gbps
Input Ports	1×HDMI, 1×3.5mm Mini-jack, 1×Optical (TOSLINK), 1×USB (Service only)
Output Ports	1×HDMI, 1×3.5mm Mini-jack, 1×Optical (TOSLINK)
HDMI Output Resolutions	Up to 1080p & WUXGA@60 (RB)
HDMI and Optical Audio Sampling Rates	Up to 48 kHz
Power Supply	5V/2.6A DC (US/EU standards, CE/FCC/UL certified)
ESD Protection	Human body model: ±8kV (air-gap discharge) ±6kV (contact discharge)
Dimensions	102mm (W)×147mm (D)×25mm (H)/Jack Excluded 102mm (W)×155.75mm (D)×25mm (H)/Jack Included
Weight	338g
Chassis Material	Aluminum
Color	Black
Operating Temperature	0°C~40°C/32°F~104°F
Storage Temperature	-20°C~60°C/-4°F~140°F
Relative Humidity	20~90% RH (non-condensing)
Power Consumption	5.5W

8.2 Supported Resolutions

RESOLUTION	INPUT	OUTPUT
640×480@60/72/75/85 Hz	✓	60 Hz
800×600@56/60/72/75/85 Hz	✓	60 Hz
1024×768@60/70/75/85 Hz	✓	60 Hz
1280×1024@60/75/85 Hz	✓	60 Hz
1400×1050@60 Hz	✓	✓
1600×1200@60 Hz	✓	✓
1280×800@60 Hz	✓	✓
1440×900@60 Hz	✓	✓
1600×900@60 Hz	✓	✓
1680×1050@60 Hz	✓	✓
1920×1200@60 Hz (RB)	✓	✓
480i/576i	✓	-
480p/576p	✓	✓
720p@50/60 Hz	✓	✓
1080i@50/60 Hz	✓	✓
1080p@50/60 Hz	✓	✓

9. ACRONYMS

ACRONYM	COMPLETE TERM
HDMI	High-Definition Multimedia Interface
WUXGA (RB)	Widescreen Ultra Extended Graphics Array (Reduce blanking)



CYPRESS TECHNOLOGY CO., LTD

Home page: <http://www.cypress.com.tw>

20140729 MPM-CP259HN