

CLUX-4S2 ***4x2 HDMI*** ***switch***

Operation Manual



TABLE OF CONTENTS

1. Introduction.....	1
2. Features.....	1
3. Package Contents.....	1
4. Hardware Description.....	1
4.1 Front Panel.....	1
4.2 Rear Panel.....	2
5. Remote Control.....	2
6. Connection and Installation.....	3
7. Specifications.....	3

1. Introduction

The 4x2 HDMI switch allows four HDMI sources such as DVD/BLU-Ray players to send audio/video signals to two HDMI displays. Thanks to the included remote control you no longer have to manually connect your various gadgets, all you have to do is plug them into the CLUX-4S2 and using the remote decide which source goes to which display. Helping you switch between various HDMI devices with ease, the CLUX-4S2 HDMI switch is a sleek and stylish device that solves your HDMI switching needs.

2. Features


- HDCP 1.1 and DVI 1.0 compliant.
- Allows four HDMI sources such as DVD/BLU-Ray players to send audio/video signals to two HDMI displays (does not support simultaneous output).
- Supports HDMI with Deep Color Video at up to 36 bits (12bits/color) and a new lossless compressed (Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio) digital audio.
- Equalizes and recovers incoming TMDS data before re-transmitting it with perfect quality regardless of the incoming signal.
- Supports high definition input/output at up to 1080p@60Hz.
- Supports CEC function.
- Easy to install and operate.

3. Package Contents

- 4 x 2 HDMI switch.
- 5V/1A DC power supply adaptor.
- Operation Manual.

4. Operation Controls and Functions


4.1. Front Panel

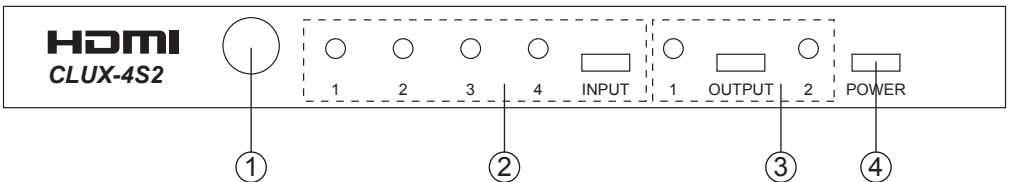

- ①. Remote Control Sensor.
- ②. HDMI input selection/Indicator: Press the Input button to switch to your desired HDMI source (HDMI 1 to HDMI 4). The input LED will turn on to indicate which source has been selected.

- ③. HDMI output selection: Press the Output button to select your desired output device. The output LED will turn on to indicate which output port has been selected (Does not support simultaneous output).
- ④. POWER Switch/Indicator: Press the "POWER" button to turn on/off the power.


4.2. Rear Panel

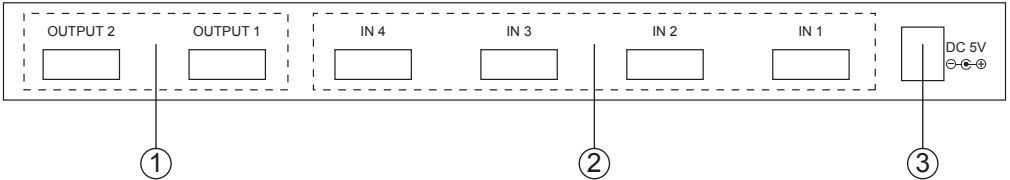


- ①. HDMI Outputs 1 and 2: Connect each of the output ports to the HDMI display.
- ②. HDMI Inputs 1 to 4: Connect each of the input ports to an HDMI/DVI source such as a DVD/Blu-Ray player or Set Top Box.
- ③. Power: Plug the 5V DC power supply into this unit and connect the adaptor to AC wall outlet.

5. Remote Control

1. Power: Press the button to turn on/off the unit.
2. Direct input selector: Press 1, 2, 3 or 4 to select the desire input source.
3. Direct output selector: Press 1 or 2 to select the desire output port.

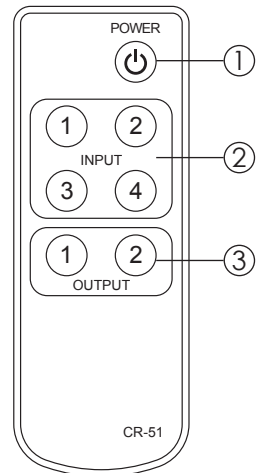

6. Connection and Installation

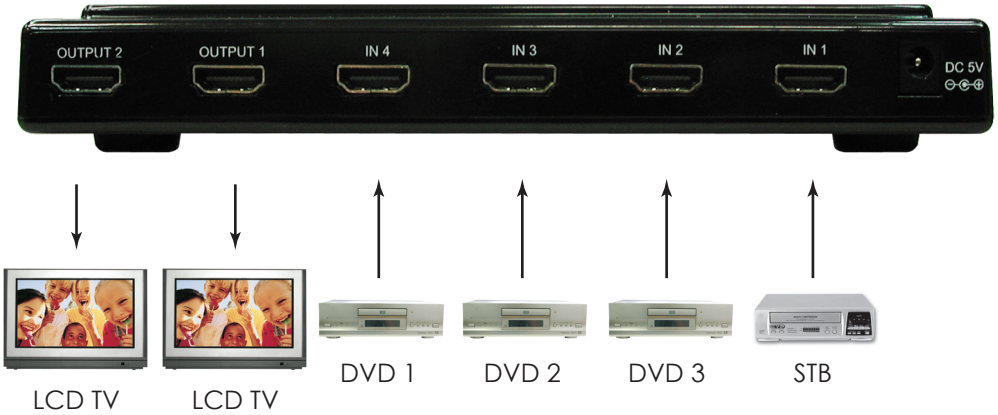

7. Specifications

Input Ports	4 x HDMI
Output Ports	2 x HDMI
Power Supply	5V/1A DC (US/EU standards, CE/FCC/UL certified)
Dimensions (mm)	206(W) x 111(D) x 32(H)
Weight(g)	248
Chassis Material	Plastic
Silkscreen Color	Black
Operating Temperature	0°C ~ 40°C



CYPRESS TECHNOLOGY CO., LTD.
Home page: <http://www.cypress.com.tw>