

LiFePO4

Next Generation Lithium Batteries.



FACT SHEET

This is a basic technical overview on our range of LiFePO4 lithium batteries.

- A LiFePO4 battery is made by combining multiple cells in series and parallel to provide the required voltage and charge capability. For a standard 12V battery this requires 4 cells in series (often expressed as 4S) with a nominal voltage of 12.8V.
- Within each battery housing exists a battery management system (BMS). This is used to oversee the well being of the overall battery pack and manages issues such as Over-voltage cut off, Low battery cut off and Over temperature shut down. It also balances the multiple single cells within the battery ensuring they are all correctly charged.
- Due to the BMS design, not all LiFePO4 batteries can be wired in series, and if they can be, there are limitations as to how many can be wired in a series string. Maximum for our range is 4 pieces. Generally there are no problems wiring the batteries in parallel. In theory, you could use unlimited batteries in parallel.
- It is important to note that prior to first use, all LiFePO4 batteries should be fully charged. Altronics LiFePO4 batteries are supplied 30% charged from the factory.
- If a LiFePO4 battery's BMS "low battery cut off" activates, it will disconnect the battery from the battery terminals. This will present a very low voltage across the battery terminals (potentially 0V) which may look like the battery is dead, but simply indicates that it is protecting itself. Chargers designed for LiFePO4 batteries will recognise this and bring the battery out of protect mode via various methods. For example our M8536A charger will pulse charging voltage into the BMS until it has charged the battery enough for the BMS to reconnect the battery (this can take up to 20 minutes). Once the battery has been reconnected, charging will proceed as normal.
- At a pinch a LiFePO4 can be charged with an SLA charger, however this will make poor use of the battery's capacity and we strongly recommend a LiFePO4 compatible charger such as M8536A.


Lithium's offer several advantages over traditional SLA batteries.

- ✓ Weight - up to half the weight of equivalent SLA models
- ✓ Low self discharge
- ✓ Longer service life up to 10 years
- ✓ Can't be damaged by over discharging
- ✓ Built in battery management system BMS to protect the battery

LiFePO4 Lithium Iron Phosphate Batteries

12V300AH

Model:SL4587A

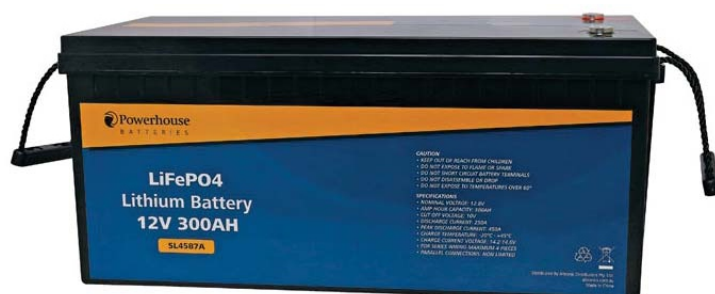
Powerhouse
BATTERIES


The latest generation in maintenance free batteries is here! LiFePO4 batteries offer longer service life than traditional lead acid batteries, plus weigh less than HALF as much as SLA batteries. LiFePO4 also provide more usable life per cycle, allowing for longer run times by holding a higher voltage until capacity is almost exhausted. These batteries will also maintain 80-90% charge when in storage - far higher than their lead acid counterparts.

Each battery is fitted with an internal battery management system to provide safe charging and discharging at all times. This system provides internal short circuit, over temperature and under/over voltage cut off. Can be wired in series and/or parallel.



Applications

**BATTERY SPECIFICATIONS**

Battery Type - Chemistry	LiFePO ₄	Internal Resistance - Milliohms	< 3mΩ
Nominal Voltage	12.8 V	Efficiency - round trip	> 99.5%
Amp Hour Capacity	300 AH	Self Discharge per Month	< 3%
Energy Density	3840 Wh	Max 4 - series connections	12-48V
Dimensions (L*W*H)	522*240*223 mm	Parallel connections	No Limited
Weight	29.2 KG	Case IP Rating	IP65
Terminal Type	M8	Design Life	20 Years
Terminal Torque	12.4 NM	Cycle Life (1C, 25°C@80%DOD)	>4000 cycles
Case Material	ABS	Cycle Life (0.2C, 25°C@80%DOD)	>6000 cycles
BMS build-in	Yes	Discharge Temperature	(-23 to 65)°C
Recommend Charge Voltage	14.2 ± 0.20V	Charge Temperature	(-3 to 65)°C
Max Charge Voltage	14.8 ± 0.20V	Storage Temperature	(-20 to 45)°C
Recommend Charge current	60 A	Bluetooth(APP)	Optional
Max Charge Current	200 A	LCD Screen	Optional
Charge Current (0 to -10°C)	<0.1C	Heating functions -20°C	Optional By Charger
Charge Current (-20 to -10°C)	<0.05C	Batteryself heating function	Optional By Cell
Recommend Discharging voltage	10.8 ± 0.20V	Shipping Classification	UN3480, CLASS9
Max Discharging Voltage	8.8 ± 0.20V	Other Certifications	CB /CE
Max Discharge Current	200 A		
Pulse Discharge Current	900A/3S		

LiFePO4 Lithium Iron Phosphate Batteries

12V300AH

Model:SL4587A




BMS SPECIFICATIONS

BMS Version: JBD


BMS Protections Range: Over (Voltage, Current, Temperature management) and cell balance

Over Charging Cell protection	>3.75±0.03V	Delay 500ms-1500ms
Over Charging Pack protection	>15.0±0.12V	Delay 500ms-1500ms
Over Charging Current 1	320±80A	Delay 500ms-1500ms
Over Charging Current 2	--	Delay 500ms-1500ms
Over Charging Temp Protection 1	-15±5°C or 54±5°C	Release -8±5°C or 49±5°C
Over Discharging Cell protection	<2.2±0.08V	Delay 500ms-1500ms
Over Discharging Pack protection	<8.8±0.32V	Delay 500ms-1500ms
Over Discharging current 1	1600±350A	Delay 5ms-15ms
Over Discharging current 2	3200±700A	Delay 500us-1500us
Over Discharging Temp Protection 1	75±5°C	Release 58±5°C
PCB Temp protection	90±8°C	Release 65±15°C
Cell Balance Start	3.50±0.05V	
Cell Balance Current	200±50mA	
Short circuit	6400±1200A	Delay 200-800us


Different DOD Discharge Cycle Life Curve 1C 25C

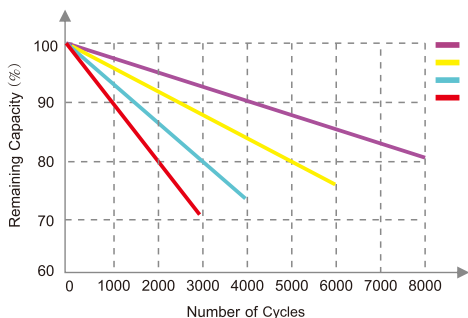

Different Temperature Discharge Curve(0.2C)

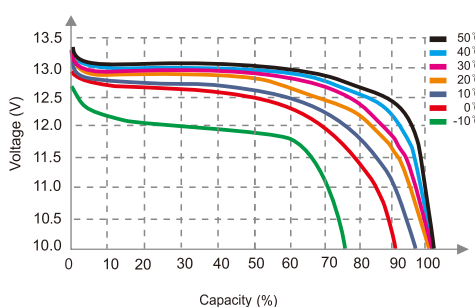

State of Charge Curve(0.5C, 25°C)

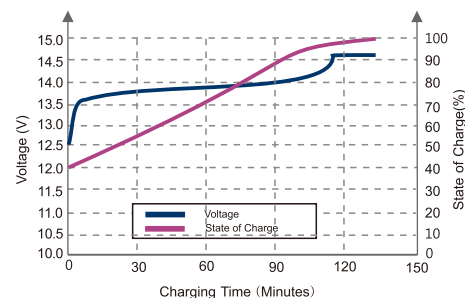

Important Information Regarding Your Lithium Battery.



The Powerhouse range of Lithium batteries have undergone two charge/discharge cycles at the factory during manufacture, and are only shipped with approximately 30% charge.

It is important to completely charge a new battery prior to first use. To obtain best performance and prolong battery life, you should use a battery charger suitable for Lithium batteries.

In an emergency you can use a traditional SLA charger, but you will not get optimum performance from the battery as it will never get to 100% charged.

Battery Management System (BMS) Overview

Every model Powerhouse Lithium battery has an inbuilt Battery Management System known as a BMS which is an elaborate electronic protection circuit. The purpose of the BMS is to protect the internal battery cells from numerous adverse conditions, including over temperature, over voltage, under voltage, over discharge as well as ensuring the internal cells making up the battery are properly charged and discharged and are overall well balanced.

SAFE/SLEEP mode.

During use, if the battery does encounter over temperature, over voltage, under voltage or over discharge situations, the BMS will place the battery into "SAFE/SLEEP" mode. When in this "SAFE/SLEEP" mode, there is no voltage present at the terminals. If you measured the battery with a DC volt meter the reading will be 0V. This could lead you to believe the battery is dead or faulty, but it is not. It is in protection "SAFE/SLEEP" mode and to continue using it, it has to be brought out of this state.

Reactivating Battery From "SAFE/SLEEP" mode.


With the battery completely disconnected, you will need to use a mains lithium battery charger with a "wake" circuit (suitable Powetran chargers include M8534A and M8536A). This will pulse the battery, eventually getting it to start charging. The time it takes varies depending on the charger used and the capacity of the battery. This can take from several minutes to more than an hour.

Do not use the battery until it has been 100% recharged.


Battery Wiring Configurations

Regardless of your wiring configuration it is technically best to individually charge each battery to 100% capacity using the same charger before connecting them. This ensures all batteries are at the same terminal voltage and will charge/discharge evenly.

Parallel Batteries (no limit on number connected - always check battery datasheets to confirm).

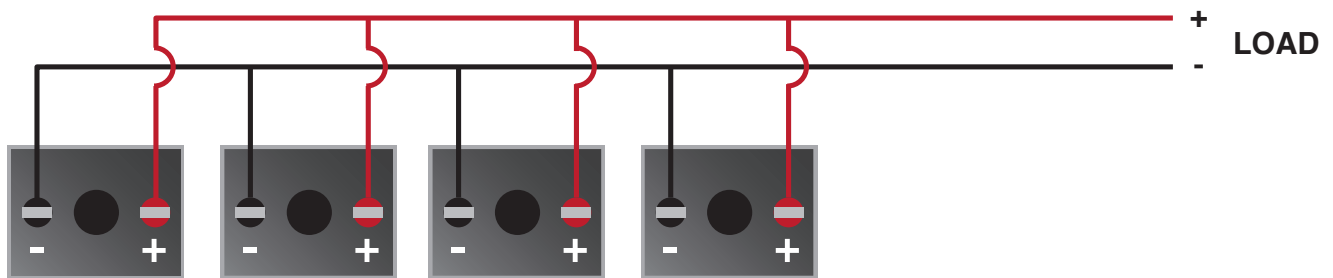

Series Batteries (maximum 4 units - always check battery datasheets to confirm).

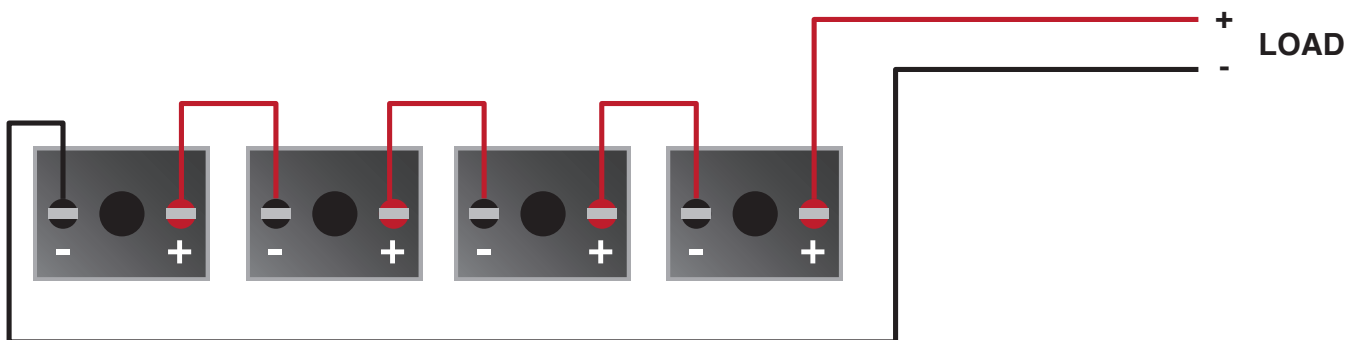

Note: When using LiFePO4 batteries in circuits, NEVER mix brands, capacities or voltages. Always use identical batteries in your circuit (ie: same brand/model, same amp hour (Ah) rating, same voltage).

Disclaimer

Information provided as a guide only. Please seek professional advice when installing battery circuits in your vehicle or trailer. Battery wiring can carry very high currents and if not fused correctly, could cause circuit failures and fires.

Warranty Statement

Altronic Distributors warrants Powerhouse LiFePO4 batteries for 5 years from date of purchase from Altronic or its resellers to the consumer. If this item is part of an installation or another product, please contact the installer or supplier for your warranty. During the warranty period, we undertake to repair or replace your product at no charge if found to be defective due to a manufacturing fault. The warranty excludes damage by misuse or incorrect installation (i.e. failure to install and operate device according to specifications in the supplied instruction manual), neglect, shipping accident, or no fault found, nor by use in a way or manner not intended by the supplier.

For repair or service please contact your PLACE OF PURCHASE.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. NOT FIELD SERVICEABLE.

Distributed by Altronic Distributors Pty. Ltd. Ph: 08 9428 2199 Internet: altronic.com.au