


RoHS compliant


REV	MODIFICATION	DATE
A0	ISSUE	2026.01.13

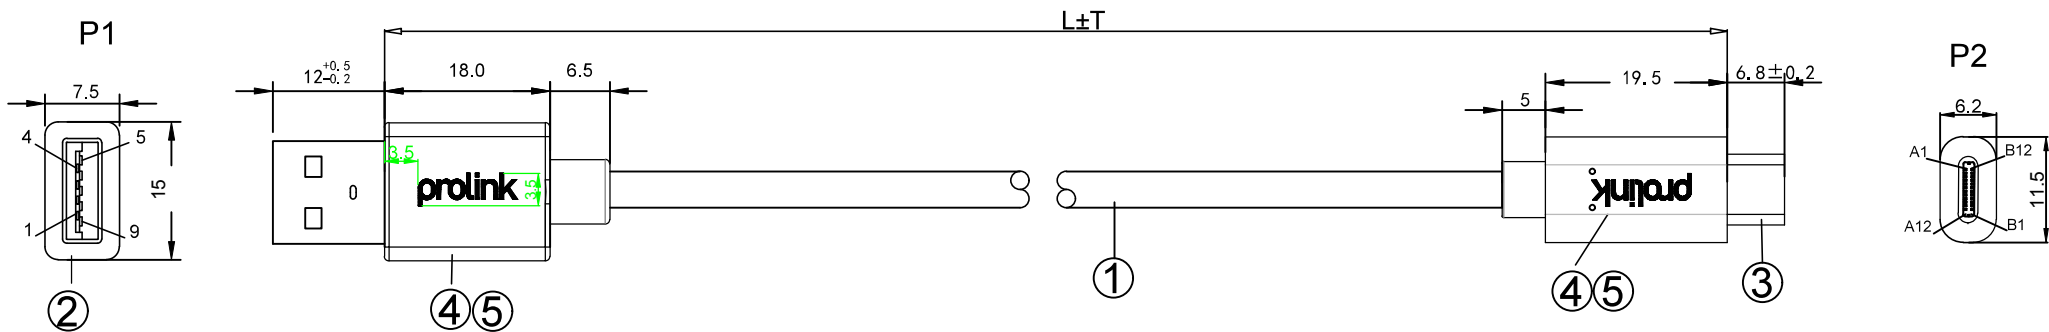

P/N CHART

HX P/N	P/N	L±T
201930279	CL1220WH-0050	500±30
201930280	CL1220WH-0080	800±30
201930281	CL1220WH-0100	1000±30
201930282	CL1220WH-0150	1500±30
201930283	CL1221WH-0200	2000±30
201930284	CL1221WH-0300	3000±40

PIN OUT

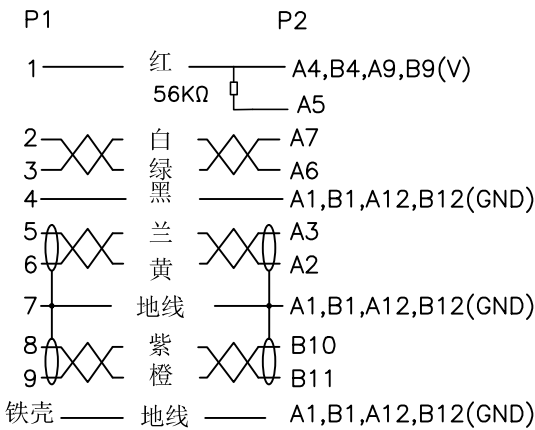

- A. Electronic Tests:
- a. Open/Short/Intermittence: 100%
 - b. Hi-Pot: AC 100V 0.01S 1mA
 - c. Insulation Resistance: DC 300V 0.1S 10MΩ Min
 - d. Conductive Resistance: 2Ω Max
- B. Transmission rate up to 10Gbps within 2 meter and 5Gbps at 3 meter
- C. Supports USB power deliver current up to 3A

⑤	Over molding	80A White TPE	13	G	角法 PROJ:	容忍公差 TOLERANCE: XX= XXX=	产品名称 PRODUCT NAME: SEE " P/N CHART"
④	Inner molding	LDPE	5	G	比例 SCALE: NONE	版本 REV: A	产品料号 PART NO: SEE " P/N CHART"
③	CONN.2	Type C Male, Gold-plated contacts, nickel-plated iron shell + PCB, 56KΩ pull-up resistor	1	PCS	单位 UNIT: MM	页次 SHEET: 1/2	客户 CUST:
②	CONN.1	USB3.0 Type A Male, Gold-plated contacts, Blue core, Nickel-plated iron shell	1	PCS	客户回签 SUST APPROVED:	Ningbo FTZ Tianning Technological Electronics Co. Ltd	
①	CABLE	[32AWG(7/0.08T)*1P+Drain wire(7/0.08T)+AL-MY]*2P+32AWG(7/0.08T)*1P+24AWG(41/0.08T)*2C+Drain wire(7/0.08T), Graphene conductive TPE white jacket, OD: 4.5±0.2mm	L	MM	核准 APPROVED:		
					审核 CHECKED:		
	NAME	SPECIFICATION	Q'TY	UNIT	制图 DRAWING: Ceasar 2026.01.13		