

PUCK[™] TACTILE TRANSDUCER MINI BASS SHAKER


Model: TT25-8 / TT25-16 User Manual




Overview: The Dayton Audio PUCK[™] is a small tactile transducer intended to be used in Home Theater, Gaming, and Auto Sound applications. Its unique ability to transfer low frequency sound waves directly to the listener is achieved by mounting the PUCK[™] to surface areas that a listener's body will come into contact with. Because the listener "feels" the low frequency, the volume of the overall sound can be kept to a minimum without sacrificing the audio quality.

Flush Mounting: For installation into areas with minimal clearance the PUCK is designed to nest into a 70 mm hole (with notch area for wiring). Use the template below for suggested hole cutout.

Surface Mounting: Use the included surface mounting ring (SMRK-2) for easy installation onto flat surfaces with ample clearance.

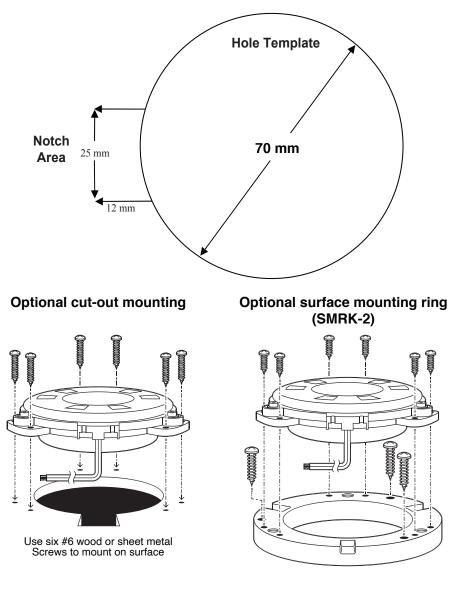

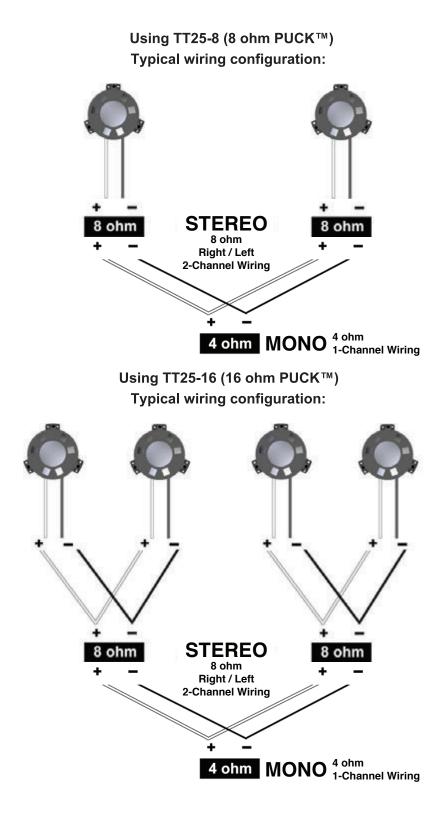

Wiring:

- · Use standard wire nuts to join wires
- If possible, always pre-wire prior to permanent mounting
- · Verify and match the impedance of any receiver/amplifier shown in the wiring configuration diagrams
- · Should you have any questions regarding wiring or installation, contact your place of purchase

| Model number | TT25-8 | TT25-16 |
|------------------------------|----------------------------|----------------------------|
| Power handling (RMS/Peak) | 20/30 | 20/30 |
| Impedance | 8 ohm | 16 ohm |
| Frequency response (Hz) | 20-80 | 20-80 |
| Fs (Hz) | 40 | 40 |
| Force Peak (lbs./ft.)* | 30 | 30 |
| Dimensions Diameter x H (in) | 3-1/2" dia x 1" H | 3-1/2" dia x 1" H |
| Cut-out size (in) | 70 mm dia. with 25 mm slot | 70 mm dia. with 25 mm slot |

Specifications

5-Year Limited Warranty

See daytonaudio.com for details



daytonaudio.com 202743 8248 705 Pleasant vancy 2... Springboro, OH 45066

