G45CL wiring diagram

(Connects to video input source)

M

6 Metres

F **M**

Moulded splitter

1.5 Metres

Power connector
(Positive wire connects to reversing lamp/
Negative wire connects to chassis or negative of lamp)

F **M**

Stealth Camera

ABC

Cut Loop to Mirror image
ABC

Cut Loop for Parking Lines

NTSC

Cut Loop for PAL Colour Systems
PAL

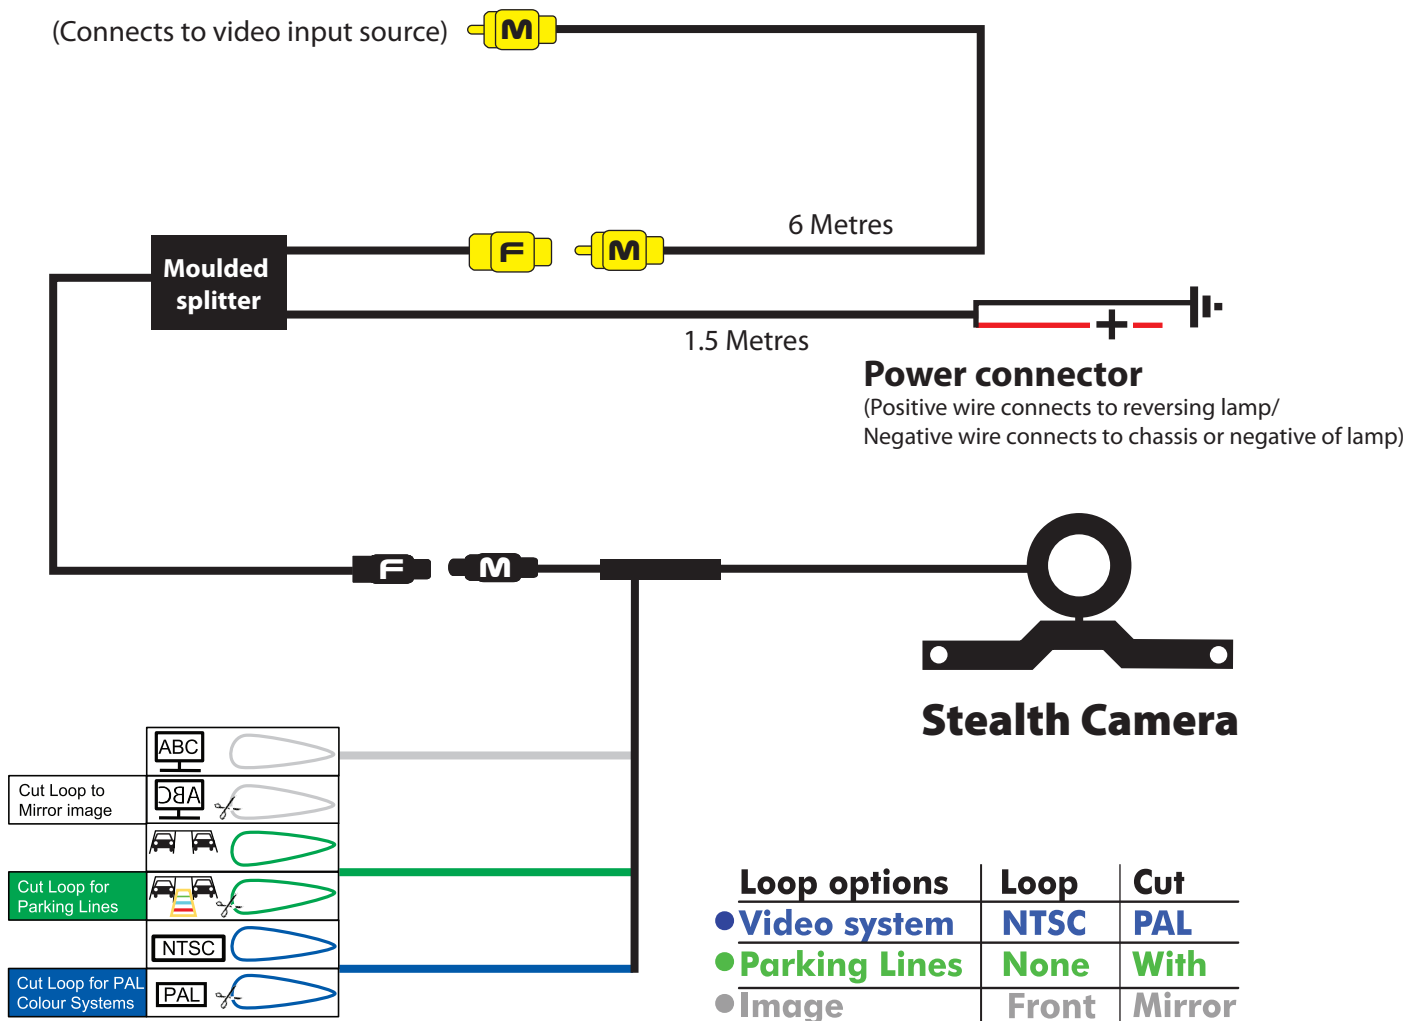| Loop options	Loop	Cut
● Video system	NTSC	PAL
● Parking Lines	None	With
● Image	Front	Mirror

Note: When cutting loop wire make sure unit is turned off

Specifications

Stealth Camera with Loop: CMOS
120/60 Degree viewing angle.
Camera IP Rating: IP67 (0.5M- 4 Hrs)
Camera Mount type: Number Plate
Includes 1.5M Power Wire and 6M RCA Lead
Colour system: NTSC/PAL
Supply Power: DC12V +/- 10%

Technical Assistance

If you need assistance setting up or using your Gator product now or in the future, call Gator Support.
Australia
TEL: 03 – 8587 8898
FAX: 03 – 8587 8866
Mon-Fri 9am – 5pm AEST
Please retain this user guide for future reference.