



NeoCD3.0 True Ribbon Tweeter


FEATURES

- strong Neodymium magnet
- 3 inch enforced sandwich diaphragm
- build-in impedance convertor
- low distortion, very fast transition

Parameter	
Sensitivity	93dB/1m/2.83v
Power handling	17W nominal, 40W max
Frequency range	1,400-40,000Hz
Nominal impedance	7 ohm
DCR	0.02 ohm
Ribbon dimension	8mmX60mmX0.015mm
Effective ribbon area	480 square millimeter
Ribbon weight	18 milligram
Gap flux	0.6 Telsa average
Gap height	3 millimeter
Recommend crossover frequency	2,500Hz with 3-order
Net. Weight	650 gram




SPL vs Freq

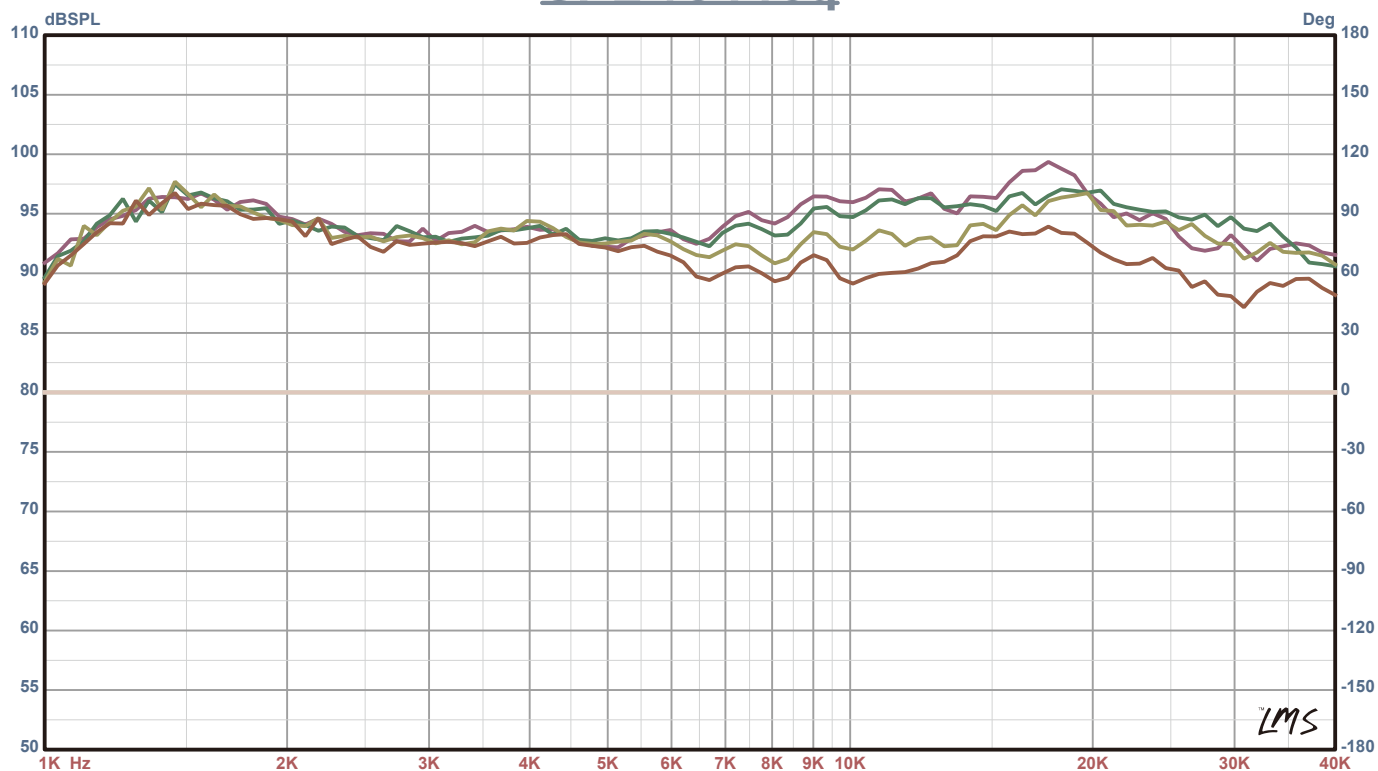

horizontal diffusion: on-axis, 15 degree , 30 degree, 45 degree

SPL vs Freq

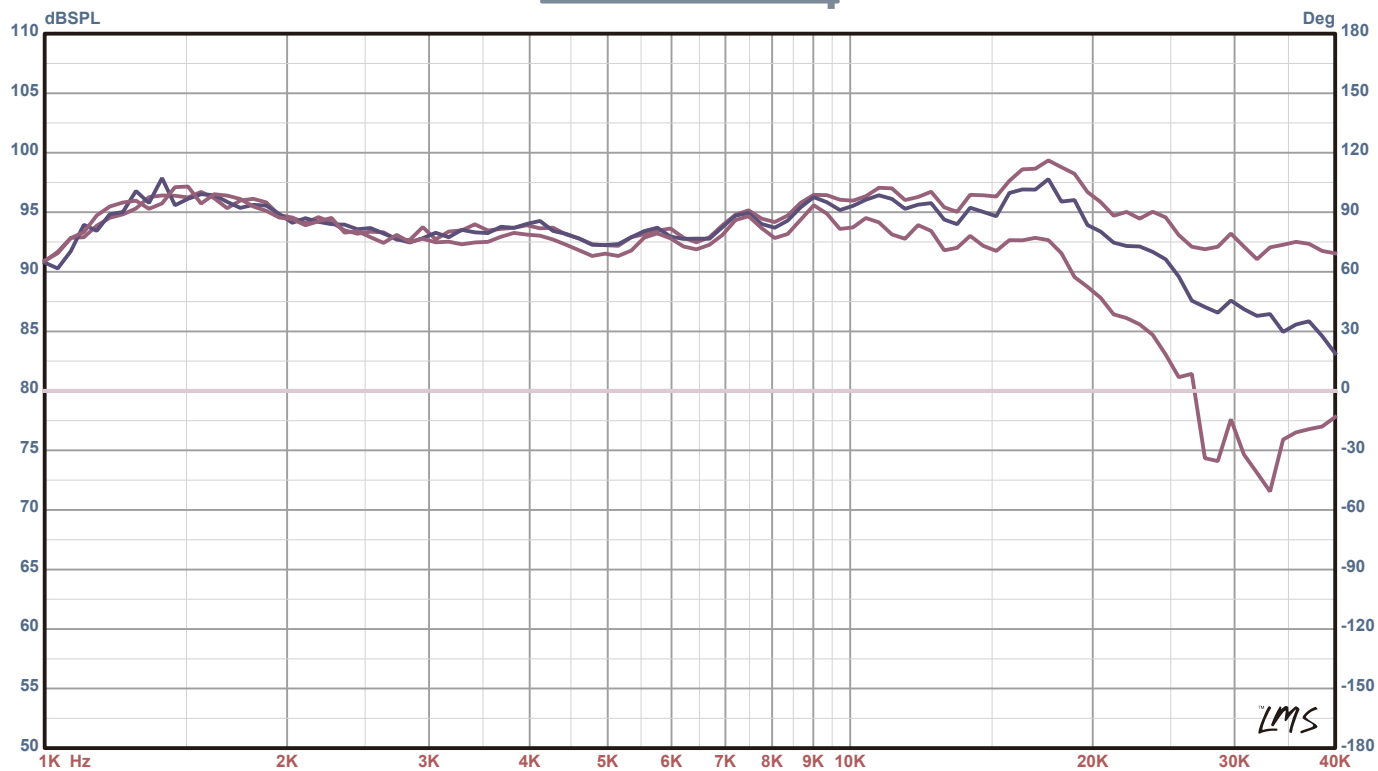

vertical diffusion: on-axis, 5 degree , 10 degree

www.fountek.net

email: info@fountek.net

tel: +86-573-8301 9220 fax: +86-573-8301 9221

