

Product Information


DT Accessories
PC6



DESCRIPTION

2-wire system 24V Power comb with Din-rail mounting


DIMENSION



FEATURES

- ▶ Power comb unit for DT system;
- ▶ Universal AC input/full range;
- ▶ Short circuit, overload and over voltage protections;
- ▶ Din-rail mounting; DC28V 1.5A output

1. Parts and Functions

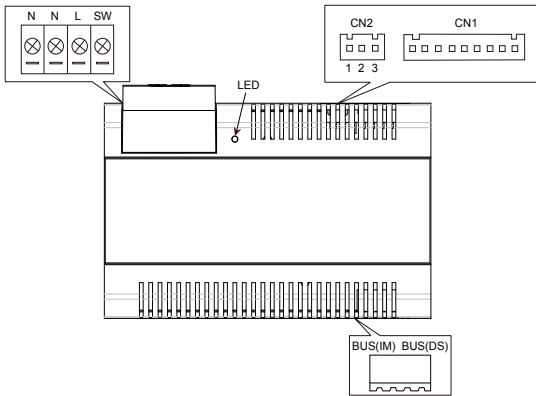

N: AC input.

L: AC input.

SW: switch terminal. It can extend to connect light or lock.

LED: power indicator, always on when plug in power.

CN2: normal power comb or auxiliary power comb selection terminal. Please refer to part 4.


CN1: bus control terminal.

BUS(IM): indoor monitor connection terminal.

BUS(DS): door station connection terminal.

2. Unit Mounting

DIN rail mounting

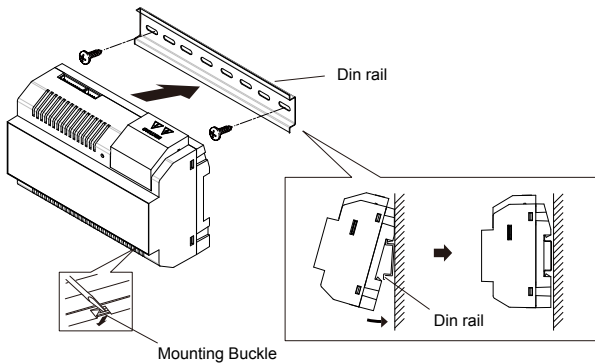

Step1: Mount the din rail to the wall with screws ;

Step2: Pull down the mounting buckle, then hang the unit on din rail.

3. Specification

- * Input Voltage: 100~240Vac
- * Input Frequency: 50~60Hz
- * Rated Output Voltage: DC 28V[±]2V
- * Rated Output Current: 1.5A
- * Working Temperature: -10⁰C~50⁰C
- * SW Port Input Voltage: Max.230Vac, 2A
- * Dimension: 140*90*60mm

4. Ordering Information


Model No.	Brief Description	Remark
PC6-24V(DIN)	24V Power supply	Din-rail mounting

5. Packing Information



Dimensions: 153(H) X148(W) X68(D) mm

Gross Weight:

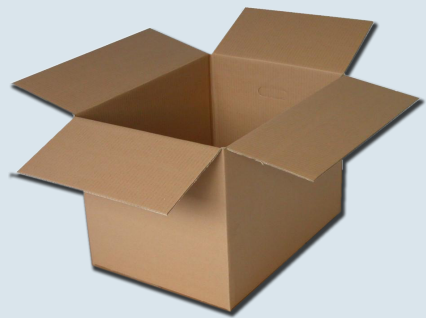

Carton: 495(H) X403(W) X310(D) mm

Quantity: 30PCS