


Operation

The highly efficient audio amplification of the Accento Dynamica ADA42BT provides an amazing soundstage and presence combined with enhanced clarity and sound quality; all at an amazingly low price. The ADA42BT features the TPA3116 developed for its efficiency and performance. The TPA3116 is a dual BTL class-D audio amplifier with single power supply designed for home audio applications and is fully protected against faults with built-in thermal and short-circuit protection. This is the perfect stereo amplifier for desktops or bedrooms. It is small, but generates powerful, pristine audio.

Specifications

Power Output:	50WRMSx2 THD=10%
Bluetooth Version:	5.0
Minimum Speaker Impedance:	3 ohm
Signal-to-Noise Ratio:	93 dB
Input Impedance:	10k ohm \pm 5%
Frequency Response:	20-20,000 Hz
Channel Separation:	85 dB
Dynamic Range:	93 dB
Electrical Requirement:	DC18V-24V
Signal Input:	RCA gold-plated lotus signal input
Signal Output:	4-wire signal output. Bare-wire or 4 mm
DC Plug:	O/D 5.5mm, Centre Pin 2.5 mm(Positive)
Case Material:	Extruded Aluminium body - Anodized front panel.
Dimensions:	W140*D90*43mm
Weight:	0.35KG

accento[®]
dynamica

ADA42BT

INSTRUCTION MANUAL

COMPACT 50W×2 STEREO BLUETOOTH AMPLIFIER

CLASS-D



accento[®]
dynamica

Accento Dynamica ADA42BT

The compact size of the Accento Dynamica ADA42BT makes it an ideal choice for small areas with limited space or for those looking for a cleaner audio environment. This amp is remarkably compact, yet still delivers crisp, vibrant sound comparable to much larger amplifiers. Centered on the TPA3116, this Class-D amplifier is highly efficient while delivering deep bass and an expanded sound stage to the listener.

Features

- Class D amp design maximizes fidelity and efficiency so your music sounds its best in a convenient compact package
- Simple operation with an on/off switch & volume control knob
- All metal case black anodised extruded aluminium rubber feet
- RCA Stereo line level gold-plated input
- Bare-wire or 4mm speaker connection terminals
- Highly efficient operation with realistic audio sound stage
- Small size lets you use this amp almost anywhere

Includes

- ADA42BT 2x50W RMS Bluetooth Digital Stereo Amplifier
- Bluetooth Antenna


Safety Instructions

- To prevent fire or electrical hazard do not disassemble this product.
- Do not expose the unit to water or moisture.
- Do not place liquid on or close to unit.
- Do not place unit on or near an open flame or heat source.
- Keep product free from dust and debris.
- Place unit on a stable and level platform.
- Do not place heavy items on top of unit.
- Do not use excessive force when pushing the unit buttons.
- Do not attempt to pull the power cord when removing it from power outlet.
- Do not use damaged or defective power cables.
- Unplug the power cable if the unit is not in use.
- Clean with a damp cloth only.

Connection

Connection and operation of the ADA42BT is simple and straight forward. On the front of this amp you will find a push button on/off switch and smooth analogue volume control. The back panel features stereo RCA Gold-Plated inputs, perfect for using with audio devices, tablets, PCs, etc. Speaker connection is via 4 gold-plated terminals. Each accepting screw-in bare wire up to 12AWG. Or connect using common 4mm banana type plugs (not included).

1. Power LED
2. Power Switch
3. Volume Control
4. Channel Input L/R
5. Speaker Output L/R
6. Power Pack Input

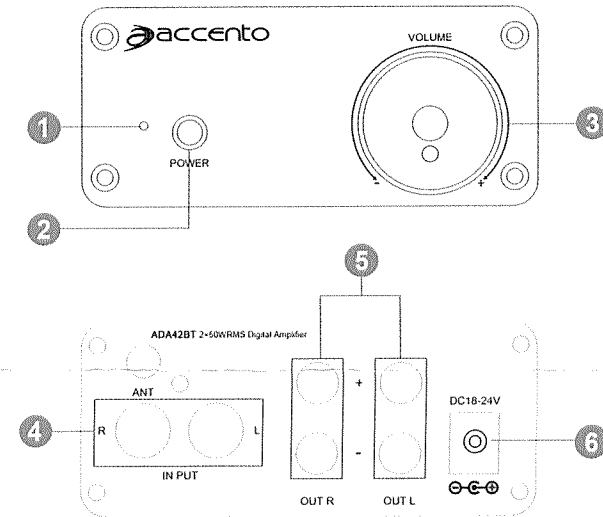

1. Power LED Indicates the unit is receiving power and is fully operational
2. Slide the button up and down
3. Volume Control Knob adjusts the volume level of the amplifier. Prior to powering your amplifier on, please turn the Volume Control Knob all the way to the LEFT. Powering your amplifier on at higher volume may damage your speakers.
4. RCA-Type Audio Inputs RCA-type line level input for connection of devices such as CD players, PCs, and portable audio devices like mobile phones, etc. An adapter can be purchased separately that will allow 3.5mm connection.
5. Speaker Outputs. The speaker output connections utilize high current binding posts that will accept standard banana plug connectors (sold separately). The connectors are color coded for easy polarity identification. If you do not have banana plugs available, the binding posts can be unscrewed and wire can be inserted into the posts and will accept 12AWG to 20AWG wire speaker wire.
6. Power Connection. The ADA42BT operates on 18 to 24VDC and should be provided with at least 5A.