


## MODEL : DTSR-25

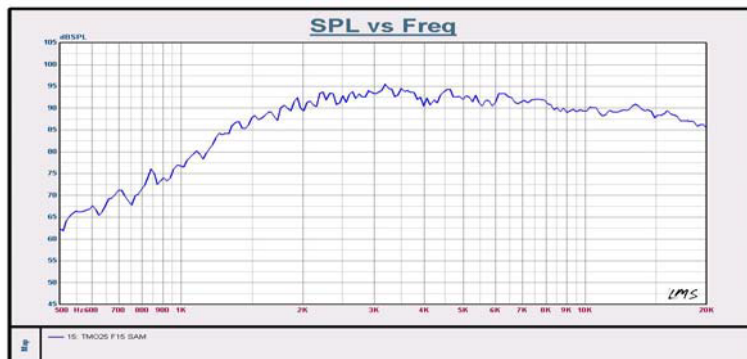

### FEATURES AND SPECIFICATIONS:

- Aluminum diaphragm/ silk edge
- 1" voice coil with duralumin former
- 13 OZ Ferrite magnet
- Ferrofluid cooled motor structure
- ABS Plastic Material tweeter cover

Maximum Power Handling	----- 50Watts Maximum
Impedance	----- 6 Ohms
Sensitivity	----- 90dB 1W/1M
Resonance Frequency	----- 1400 Hz
Frequency Range	----- 1200 Hz to 20 KHz

Re	6Ω
Fs	1400Hz
Freq.	1.4Khz-20KHz
Power	25Wrms/60Wpeak



LOT 10, BLK 5 PHASE II CAVITE ECONOMIC ZONE  
ROSARIO, CAVITE PHILS.  
TEL NO. (6346) 437-0326-27 / FAX NO. (6346) 437-0328

# DTSR25

