




AMTPOD-4 Motion Transformer Automotive Tweeter

AMTPOD-4

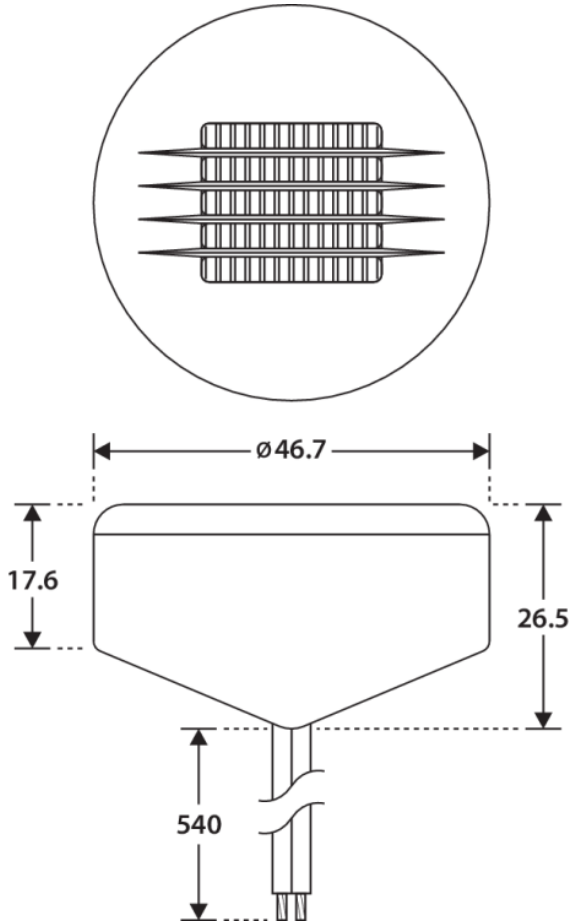

PARAMETERS

| | |
|-----------------------------|-------------------|
| Impedance | 4 ohms |
| Re | 2.9 ohms |
| Le | N/A |
| Fs | N/A |
| Qms | 2.09 |
| Qes | N/A |
| Qts | 2.06 |
| Mms | N/A |
| Cms | N/A |
| Sd | N/A |
| Vd | N/A |
| BL | N/A |
| Vas | N/A |
| Xmax | N/A |
| VC Diameter | N/A |
| SPL | 90 dB @ 2.83V/1m |
| RMS Power Handling | 15 watts |
| Usable Frequency Range (Hz) | 4,500 - 25,000 Hz |


IMPEDANCE/PHASE



FEATURES

- Air Motion Technology, for detailed, non-fatiguing treble
- Extended, open, dynamic high-frequency performance
- Angled enclosure can be placed anywhere in your vehicle
- Pleated Kapton diaphragm with aluminum conductor for high power handling
- Includes 3M VHB mounting tape and connecting leads

FREQUENCY RESPONSE

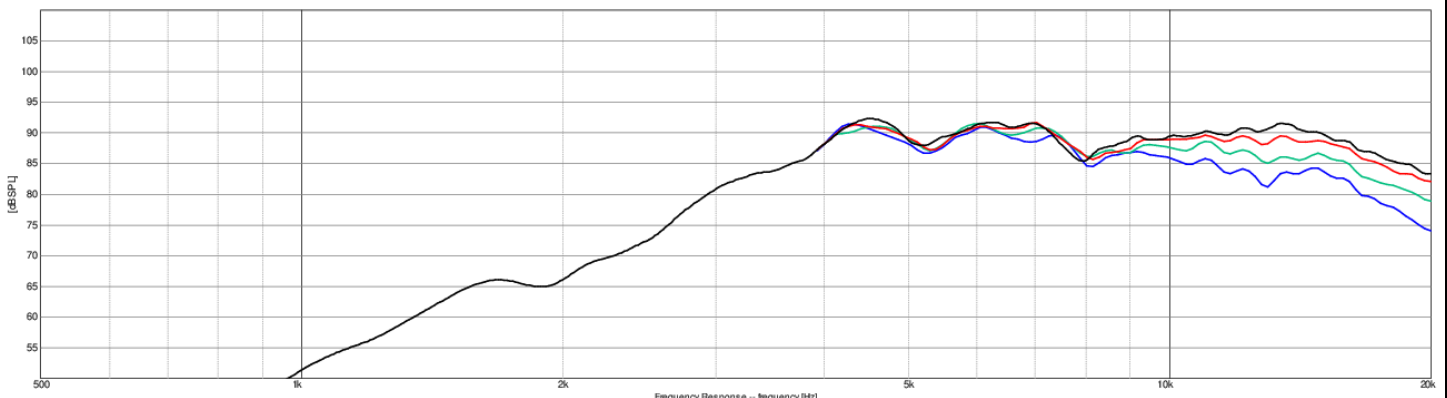

Note: 1/12th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°