
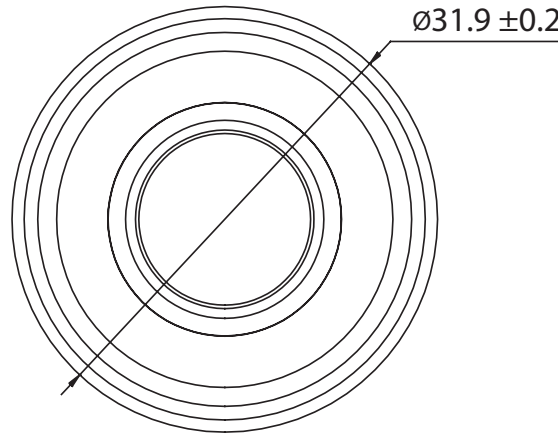


Features

- Lightweight paper cone
- Powerful dual neodymium magnet design
- Rubber surround
- Injection-moulded frame
- Compact size
- Rear-mounting design


Parameters

Impedance (Ω)	4
Re (Ω)	3.4
Le (mH) @ 1 kHz	0.18
Fs (Hz)	335.8
Qms	8.62
Qes	1.03
Qts	0.80
Mms (g)	0.65
Cms (mm/N)	0.336
Sd (cm ²)	4.095
Vd (cm ³)	0.0045
BL (Tm)	2.16
VAS (liters)	0.008
XMAX (mm)	1.1
VC Diameter (mm)	13
SPL (dB@1W/1m)	78
RMS Power Handling (w)	2.0
Usable Frequency Range (Hz)	280 - 14,000

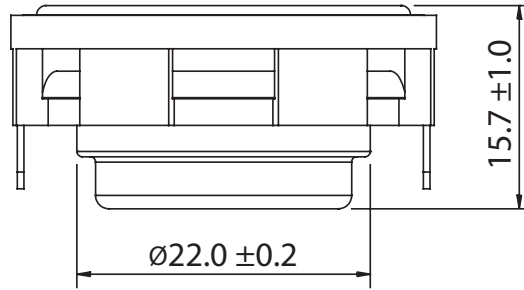

Note: All dimensions in mm.

Frequency Response

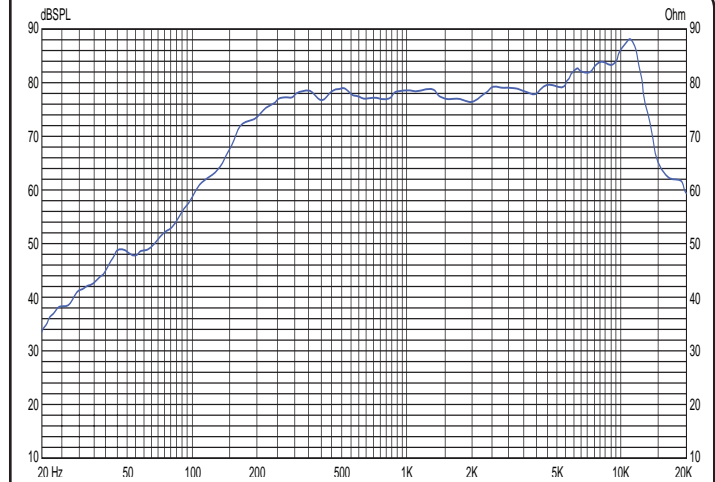

Note: Due to testing limitations, response below 200 Hz is not an actual representation.

Impedance/Phase

