
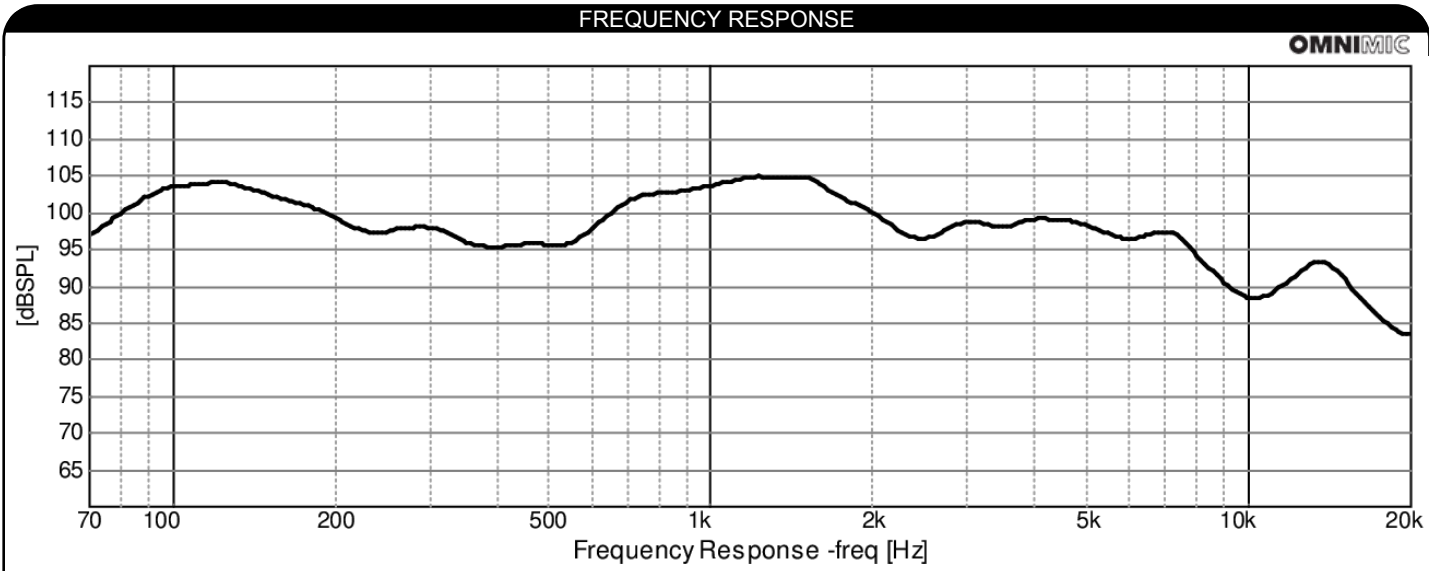


PARAMETERS	
Impedance	4 ohms
Re	4.3 ohms
Le	0.41 mH @ 1 kHz
Fs	365 Hz
Qms	N/A
Qes	N/A
Qts	0.73
Mms	1.3 g
Cms	0.0001 mm/N
Sd	N/A
Vd	N/A
BL	4.29 Tm
Vas	N/A
Xmax	N/A
VC Diameter	25 mm
SPL	N/A
RMS Power Handling	20 watts
Usable Frequency Range (Hz)	N/A

- ### FEATURES
- High output exciter design
  - Specially designed neodymium motor and proprietary 2-layer voice coil
  - 3M™ VHB™ adhesive ring with four mounting holes
  - Low inductance motor for extended response

- ### APPLICATIONS
- Invisible home theater and multi-room audio
  - Electronic gaming machines
  - Advertising signage
  - Point-of-purchase displays
  - Multimedia exhibits
  - Commercial distributed audio
  - Kiosks
  - Automotive audio
  - Bathroom tubs and showers

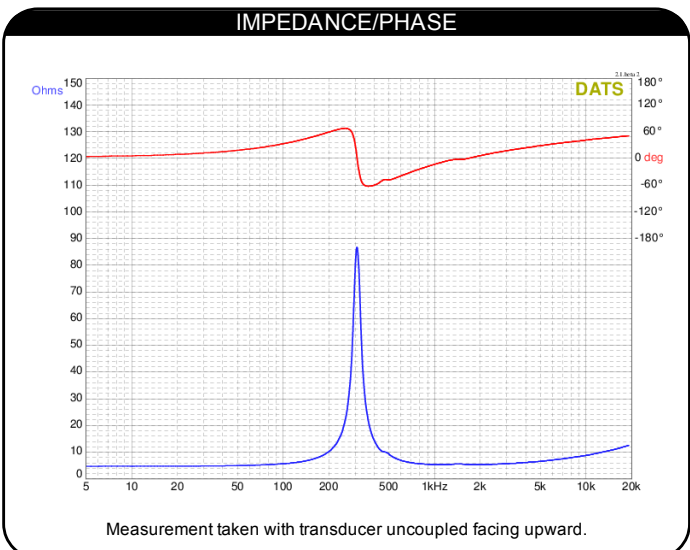

OmniMic

1/3<sup>rd</sup> octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.