
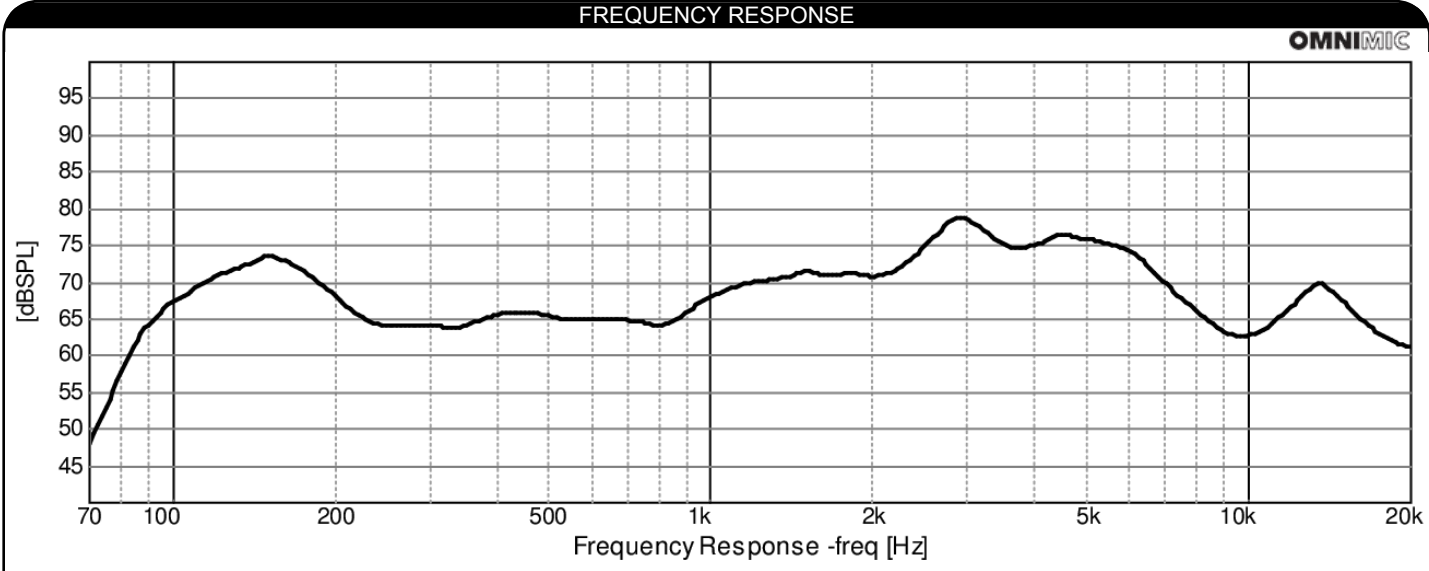


PARAMETERS	
Impedance	4 ohms
Re	3.6 ohms
Le	0.02 mH @ 10 kHz
Fs	1,200 Hz
Qms	N/A
Qes	N/A
Qts	3.00
Mms	0.076 g
Cms	0.001 mm/N
Sd	N/A
Vd	N/A
BL	0.49 Tm
Vas	N/A
Xmax	N/A
VC Diameter	9 mm
SPL	N/A
RMS Power Handling	0.5 watts
Usable Frequency Range (Hz)	N/A

- ### FEATURES
- Super small size; less than an inch in diameter, less than 3/8" high
  - 4 ohms impedance for use with small, Class D amplifiers
  - Turns almost any surface into a speaker
  - Pre-applied 3M™ VHB™ adhesive for quick, secure installation
  - Rare-earth neodymium motor

- ### APPLICATIONS
- Invisible home theater and multi-room audio
  - Electronic gaming machines
  - Advertising signage
  - Point-of-purchase displays
  - Multimedia exhibits
  - Commercial distributed audio
  - Kiosks
  - Automotive audio
  - Bathroom tubs and showers

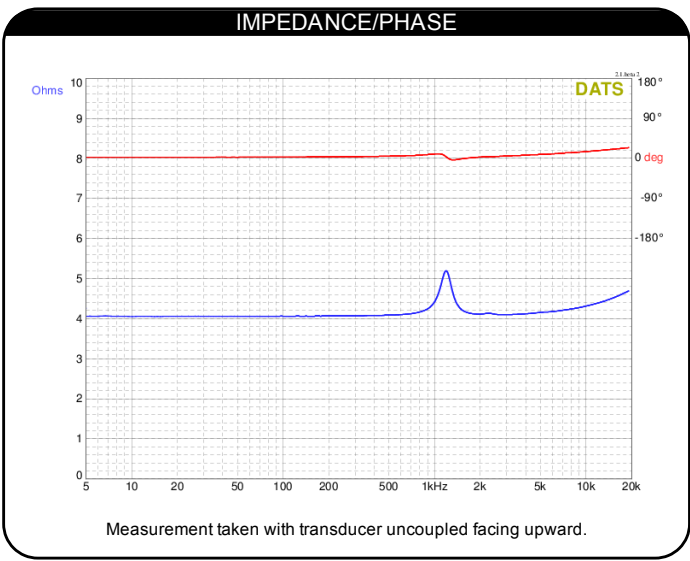

OmniMic

1/3<sup>rd</sup> octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.