


Extended Low Frequency Response

Cast Aluminum Frame

Large Excursion

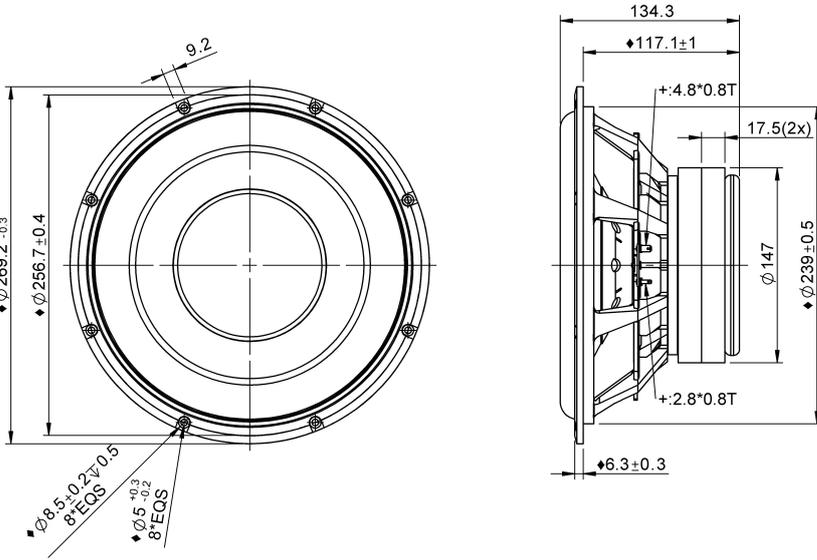


SPECIFICATIONS

Transducer Size	10	in	
Impedance	4	Ω	
Frequency Range ¹	20 - 2000	Hz	
Sensitivity ² (2.83V 1W @ 1m)	86.6 83.5	dB	
Power Rating (IEC 268-5)	150	W	
Voice Coil Size	51.3	mm	
Air Gap Winding Height	H _{ag} H _{vc}	8 33	mm
Net Weight	5.91	kg	

PARAMETERS ³

Eff. Piston Area	S _d	350	cm ²
DC Resistance	R _e	4.2	Ω
Minimum Impedance	Z _{min}	4.8	Ω
Inductance	L _e	1.7	mH
Resonance Frequency ⁴	F _s	25	Hz
Mechanical Q Factor	Q _{ms}	4.14	-
Electrical Q Factor	Q _{es}	0.313	-
Total Q Factor	Q _{ts}	0.29	-
Moving Mass	M _{ms}	120	g
Compliance	C _{ms}	350	$\mu\text{m}/\text{N}$
Equivalent Volume	V _{as}	60.3	L
Motor Force Factor	Bl	15.7	Tm
Motor Efficiency	β	59.2	(Bl) ² / R _e
Linear Excursion ⁵	X _{max}	15.2	mm
Max Mechanical Excursion ⁶	X _{mech}	21.9	mm

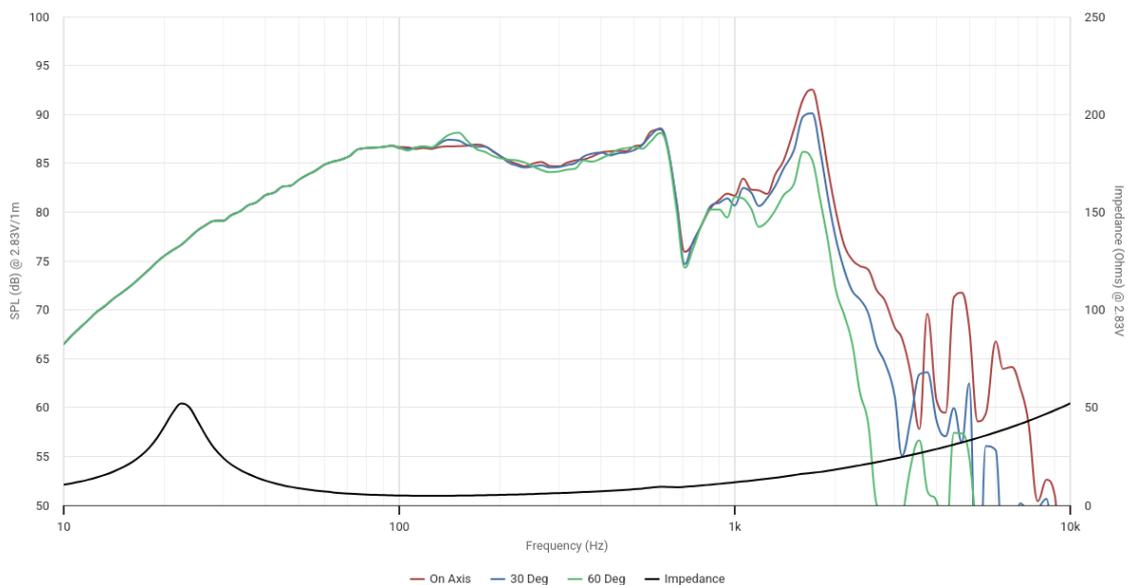

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tympany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. ¹ Specified by Engineering as linear working range of transducer. ² Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. ³ Measured in Free Air without preconditioning, therefore subject to some deviation. ⁴ Impedance and Fs value measured under different conditions. ⁵ Equal/Overhung: $(H_{vc} - H_{ag})/2 + H_{ag}/3$. Underhung: $(H_{ag} - H_{vc})/2 + H_{vc}/3$. ⁶ Mechanically limited excursion (e.g. bottoming, spider crash).