

FLEX SPEAKER SERIES

FLEX 15, FLEX 30, FLEX 50

It's all in the name.....

The FLEX series of wall mount speakers are specifically designed for both indoor or outdoor commercial sound reproduction applications. Rated IP 65 with powder coated aluminium grills and stainless steel fasteners the FLEX speaker series provides the ultimate flexible solution you've been waiting for. With a smart pan and tilt bracketing system, allowing both wall or ceiling mounting these superb sounding speaker products are suggested for the following uses: Classrooms, Places of worship, Gymnasiums, Changing rooms, Restaurants, Bars, Beer Gardens, Swimming pools, Outdoor dining plus many more indoor or outdoor applications.



Features:


- Suitable for indoor and outdoor installations
- Weather IP65 Rated
- Powder coated aluminium grill
- Pan and tilt bracket system
- Wall or ceiling mountable
- High and Low Impedance operation
- Superb sonic performance
- Sold as pairs in white or black

Specifications


	FLEX 15	FLEX 30	FLEX 50
Rated IP65	YES	YES	YES
Impedance 100v Bypass	8 Ω	8 Ω	8 Ω
100V Tappings Watts	15, 7.5, 3.75, 1.87	30, 15, 7.5, 3.75	50, 25, 12.5, 6.25
70V Tappings Watts	7.5, 3.75, 1.87, 0.93	15, 7.5, 3.75, 1.87	25, 12.5, 6.25, 3.12
Max Power @ 8 Ω / RMS	30 Watts	40 Watts	50 Watts
Sensitivity 1W/1M	88dB	89dB	90dB
Calculated SPL RMS PEAK	100dB 106dB	105dB 111dB	107dB 113dB
Dispersion -6 dB Points H x V	60° x 60°	90° x 60°	90° x 60°
Frequency Response	100-20KHz	80-20KHz	50-20KHz
Speaker Drivers	4 Inch woofer 1 Inch tweeter	5 ¼ Inch woofer 1 Inch tweeter	6 ½ woofer 1 Inch tweeter
Product Dimensions W x D x H mm	123 x 121 x 196	159 x 152 x 252	191 x 182 x 304
Shipping Dimensions W x D x H mm	330 x 154 x 217	420 x 195 x 275	502 x 233 x 329
Shipping Weight Kg	4.0	5.5	7.3

Typical Frequency Response

FLEX 15

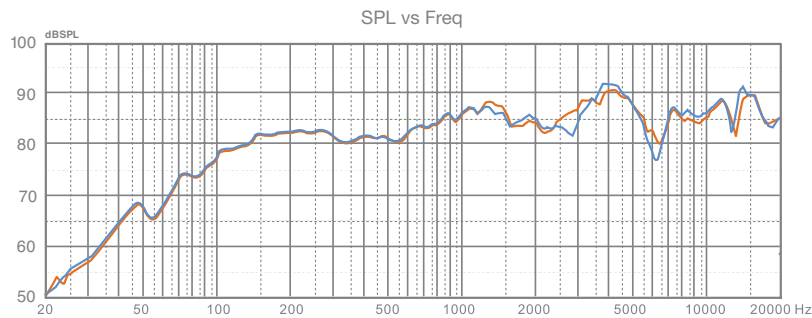

FLEX 30

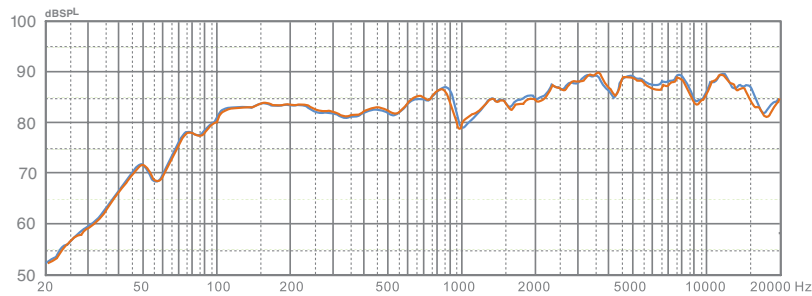

FLEX 50

