



Specifications

Specifications	QF5CS	QF6CS	QF8CS	QF8CSB
Dual Cone Driver	5 inch	6 inch	8 inch	8 inch
Power Taps @ 100v	0.75, 1.5, 3, 6 watts	1.25, 2.5, 5, 10 watts	1.87, 3.75, 7.5, 15 watts	1.87, 3.75, 7.5, 15 watts
Power Taps @ 70v	0.38, 0.75, 1.5, 3 watts	0.62, 1.25, 2.5, 5 watts	0.93, 1.87, 3.75, 7.5 watts	0.93, 1.87, 3.75, 7.5 watts
Sensitivity [1W/1M]	88dB	89dB	90dB	90dB
Frequency Response	80-20 KHz	80-20 KHz	80-20 KHz	80-20 KHz
Dispersion Degrees @ 1KHz	100	100	100	100
Baffle and Grill Colour	White	White	White	Black
Weight	0.5 Kg	0.9 Kg	1.4 Kg	1.4 Kg
Dimensions	215 x 80 mm	240 x 78 mm	280 x 90 mm	280 x 90 mm
Cutout Dimension	180 mm	208 mm	245 mm	245 mm
Evac Capacitor 2.2uF	YES	YES	YES	YES

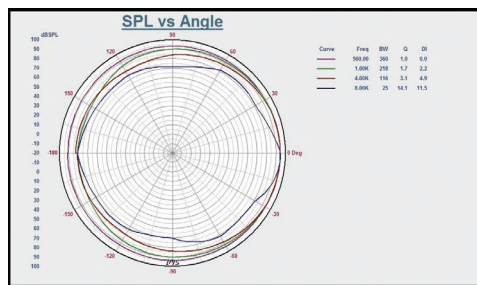


QF8CS Polar Plot

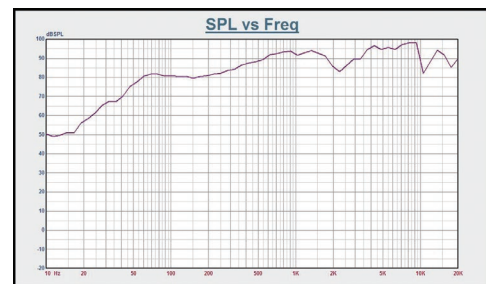

QF8CS Frequency

Polar plot and frequency response charts for other dual cone models are available at www.australianmonitor.com.au

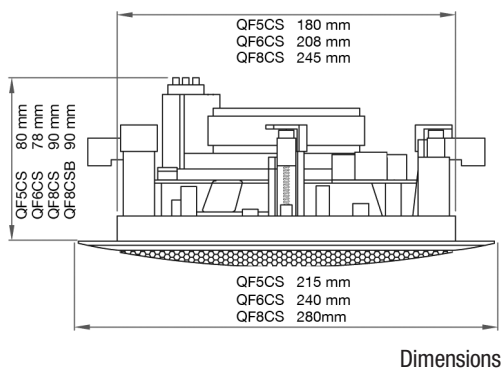

Please go to www.australianmonitor.com.au to download EASE® GLL files.