





TOWER UPS WITH LOCAL SOCKETS FOR SOHO APPLICATIONS



The GreenPower UPS providing trustworthy power protection with built-in Automatic Voltage Regulation for home and SOHO


Ideal for home, office and back office applications, the Value SOHO Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilised AC power output. This series features local sockets for connections with PCs, laptops, and printers, etc. The included RJ11/RJ45 port can provide data line protection against surges and spikes. The products' power management software achieves real-time monitoring and configuration.

SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Simulated Sine Wave Output
- Automatic Voltage Regulation (AVR)
- Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- LCD Status Display
- PowerPanel Management Software
- Tower Form Factor

PRODUCT CALLOUTS

1. Power On Indicator
2. Power On/Off Switch
3. LCD Display Panel
4. Function Button(s)
5. Battery Backup & Surge Protected Outlets
6. Communication Protection Ports RJ11/RJ45
7. Input Circuit Breaker
8. AC Inlet
9. USB Port
10. Serial Port

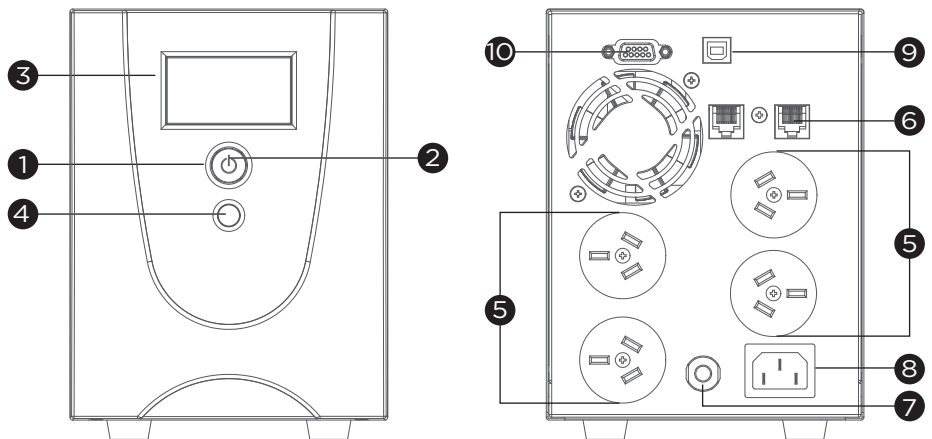

Value2200ELCD

TECHNICAL SPECIFICATIONS

Model Name	Value2200ELCD
General	
UPS Topology	Line-interactive
Energy Saving Technology	GreenPower UPS™ Bypass Technology
Input	
Nominal Input Voltage (Vac)	230 ± 10%
Input Voltage Range (Vac)	170 - 290
Input Frequency (Hz)	50 ± 5, 60 ± 5
Input Frequency Detection	Auto-sensing
Rated Input Current (A)	10
Input Connector Type	IEC C14
Output	
Capacity (VA)	2200
Capacity (Watts)	1320
On Battery Waveform	Simulated Sine Wave
On Battery Voltage(s) (Vac)	230 ± 10%
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck
Overload Protection	Circuit Breaker
Outlet(s) - Total	4
Outlet Type	AU x 4
Outlet(s) - Battery & Surge Protected	4
Typical Transfer Time (ms)	4
Battery	
Runtime at Half Load (min)	7
Runtime at Full Load (min)	1
Typical Recharge Time (Hours)	8
User-replaceable	Yes
Battery Type	Sealed Lead-acid
Surge Protection & Filtering	
Surge Suppression (Joules)	150
EMI/RFI Filtration	Yes
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out
Management & Communications	
LCD Panel	Yes
LED Indicators	Power On
HID Compliant USB Port(s)	1
Serial Port	RS232
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault
Power Management Software	PowerPanel Personal (Recommended)
Physical	
Form Factor	Tower
Physical Size - UPS Module	
Dimensions (WxHxD) (mm.)	140 x 180 x 326
Weight (kg.)	14.5
Environmental	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90
Online Thermal Dissipation (BTU/hr)	225
Certifications	
Certifications*	CE, RCM, EAC
RoHS	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
 #All specifications are subject to change without notice.