

Product Highlights

High-Speed Internet

Supports the latest VDSL standards to provide transmission rates of up to 100 Mbps downstream for a superb Internet experience

Complete Internet Solution

A total solution that helps you connect, share, and enjoy your Internet connection from a single device that's easy to set up and manage

Wireless AC Wave 2 and Gigabit Ethernet

Stream HD multimedia across your home without interruption using the fastest wired and wireless technologies available today



VIPER 2600 (DSL-3900)

Dual-Band MU-MIMO Gigabit VDSL2/ADSL2+ Modem Router

Features

Connectivity

- Built-in VDSL2/ADSL2+ modem for connecting to your high-speed broadband Internet connection
- Four Gigabit Ethernet LAN ports to connect wired devices for high-speed online activities
- One USB 3.0 port to share media from a storage device
- VPN pass-through support

Wireless

- Fast 802.11ac wireless Wave 2 for high-speed connections to all of your PCs and mobile devices
- Wi-Fi Protected Setup (WPS) to quickly add devices to your network
- Industry standard WPA/WPA2 encryption

Ease of Use

- D-Link Easy Setup Wizard

The VIPER 2600 (DSL-3900) Dual-Band MU-MIMO Gigabit VDSL2/ADSL2+ Modem Router is a versatile, high-performance router for the home and small office. With integrated VDSL, supporting download speeds of up to 100 Mbps, VPN passthrough, Quality of Service (QoS), AC2600 Wi-Fi, and four Gigabit Ethernet switch ports, the VIPER 2600 provides all the functionality that a home or small office needs to establish a high-speed connection to the Internet.

Fast and Reliable Home Network

The D-Link VIPER 2600 creates a blazing fast home network that connects all of your devices to your broadband Internet connection. Concurrent dual-band 802.11ac Wave 2 brings you the future of high-bandwidth wireless connectivity, allowing you to stream HD videos, make Internet voice calls, and surf the Internet from every corner of your home without interruption. Gigabit Ethernet ports provide high-speed wired connections for up to four PCs or other devices. Additionally, the Ethernet WAN port gives you the freedom to access the Internet via NBN or UFB Fibre, Cable, or other connection types.

802.11ac Wave 2 for Improved Performance


The VIPER 2600 features the updated 802.11ac Wave 2 specification, which improves on the bandwidth, range, and speed of 802.11ac Wave 1. The new and improved specification increases maximum speeds for the 5GHz band and adds more channels for higher speeds and less RF interference. This means you can surf the web or make Internet phone calls on the 2.4GHz band while streaming digital media on the 5GHz band from another room with minimal lag and stutter. Moreover, multiple-input and multiple-output (MU-MIMO) technology allows the VIPER 2600 to act as a dedicated router for each wireless client, giving them the ability to stream media simultaneously with faster response times. All this adds up to a better networking experience throughout your home or small office.

File Sharing Right at Your Fingertips

The VIPER 2600 lets you connect a USB storage device and instantly share documents, movies, pictures, and music. You can put your music library on a USB drive and share it with your entire home. You can show photos on the living room TV while a family member watches a movie on their computer. You can stream media files to multiple devices without interruption, or save them to your device for offline playback. The intuitive interface lets anyone immediately access a variety of entertainment options when you connect your own storage device.

Easy to Set Up

Setting up the VIPER 2600 is easy with the D-Link easy setup wizard. Simply open the setup utility and follow a few easy steps to get your home network up and running. You can also set up a WPA2 encrypted network with the touch of a button using Wi-Fi Protected Setup (WPS). To instantly connect devices using WPA2 wireless encryption, simply press the WPS button on each device.

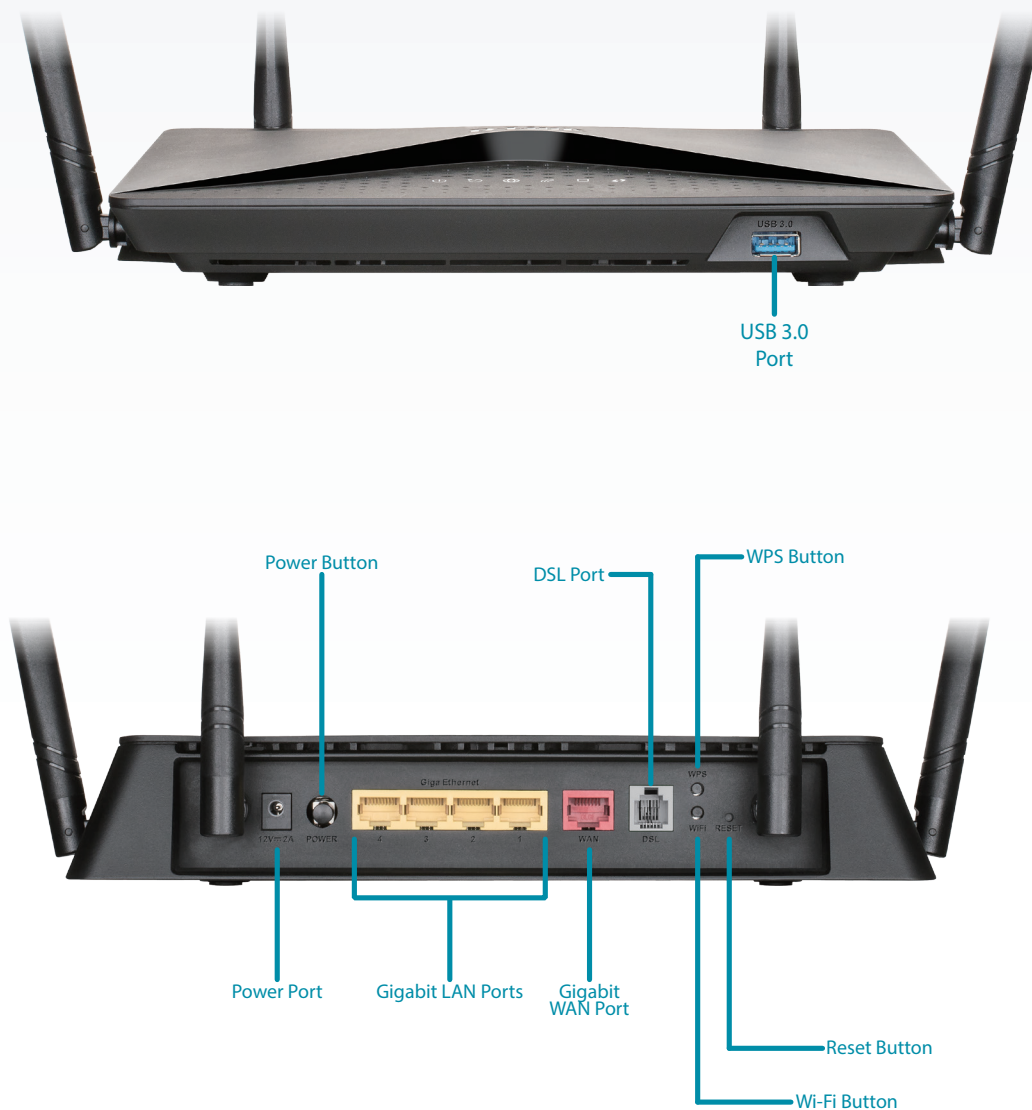

Dual-Band MU-MIMO Gigabit VDSL2/ADSL2+ Modem Router

Technical Specifications		
General		
Device Interfaces	<ul style="list-style-type: none"> • 802.11ac/n/g/b Wireless LAN • One RJ-11 Broadband port • One Gigabit WAN port 	<ul style="list-style-type: none"> • Four Gigabit Ethernet LAN ports • One USB 3.0 port
Antenna Type	<ul style="list-style-type: none"> • Four external dual-band antennas 	
ADSL/ADSL2/ADSL2+ Features	<ul style="list-style-type: none"> • PTM • G.inp • G.vector 	<ul style="list-style-type: none"> • ITU G.992.1 • ITU G.992.3 • ITU G.992.5
VDSL Standards	<ul style="list-style-type: none"> • ITU-T G.993.1 • ITU-T G.993.2 	<ul style="list-style-type: none"> • 8a, 8b, 8c, 8d, 12a, 12b, 17a, 30a, 35b
Wireless Signal Rate	<ul style="list-style-type: none"> • 2.4GHz • 800Mbps¹ 	<ul style="list-style-type: none"> • 5GHz • 1,732Mbps¹
Standards	<ul style="list-style-type: none"> • IEEE 802.11ac • IEEE 802.11n • IEEE 802.11g • IEEE 802.11d 	<ul style="list-style-type: none"> • IEEE 802.3 • IEEE 802.3u • IEEE 802.3ab • IEEE 802.3x
Minimum System Requirements	<ul style="list-style-type: none"> • Windows XP SP3 or Mac OS X 10.4 or higher • Microsoft Internet Explorer 8 or higher, Edge 20.10 or higher, Firefox 20 or higher, Chrome 17 or higher, Safari 4 or higher, or other Java-enabled browser 	<ul style="list-style-type: none"> • Ethernet or Wireless network interface • Subscription with an Internet Service Provider (ISP)
Functionality		
Wireless Encryption	<ul style="list-style-type: none"> • WPA & WPA2 (Wi-Fi Protected Access) 	<ul style="list-style-type: none"> • Wi-Fi Protected Setup (WPS)
Advanced Features	<ul style="list-style-type: none"> • Multi-language web setup wizard • DLNA media server support • Multiple PVC (up to 8) • Support for IPv6 	<ul style="list-style-type: none"> • Dual active firewall • VPN pass-through/multi-session PPTP/L2TP/IPSec • 802.1p QoS
Physical		
Dimensions	<ul style="list-style-type: none"> • 258.8 x 184.1 x 45.5mm(10.1 x 7.2 x 1.8 in) 	
Weight	<ul style="list-style-type: none"> • 643.6g (22.7oz) 	
Power	<ul style="list-style-type: none"> • Input: 12 V / 2.0A 	<ul style="list-style-type: none"> • Included AC Adapter:100-240VAC, 50/60 Hz
Temperature	<ul style="list-style-type: none"> • Operating: 0 to 40 °C (32 to 104 °F) 	<ul style="list-style-type: none"> • Storage: -20 to 65 °C (-4 to 149 °F)
Humidity	<ul style="list-style-type: none"> • 5 % to 95 % non-condensing 	
Certifications	<ul style="list-style-type: none"> • CE • Wi-Fi Certified 	<ul style="list-style-type: none"> • RCM
Order Information		
<i>Part Number</i>	<i>Description</i>	
DSL-3900	VIPER 2600 Dual-Band MU-MIMO Gigabit VDSL2/ADSL2+ Modem Router	

¹ Maximum wireless signal rate derived from IEEE Standard 802.11ac, 802.11n, 802.11g, and 802.11b specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range. Wireless range and speed rates are D-Link relative performance measurements based on the wireless range and speed rates of a standard Wireless G product from D-Link. Maximum throughput based on D-Link 802.11ac devices.

Updated 2018/11/14