
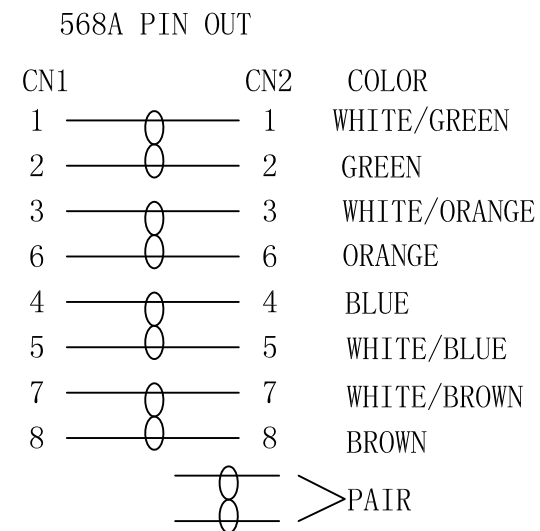




1. MATERIAL

-
- JACKET (OD: 3.7 ± 0.2)
- INSULATION
- CONDUCTORS
- SECTION A-A

Length	Tolerance
$\leq 1000\text{mm}$	$\pm 30\text{mm}$
$1000 < L \leq 5000\text{mm}$	$\pm 50\text{mm}$
$5000 < L \leq 10000\text{mm}$	$\pm 100\text{mm}$

A				Tolerance: X. ±0.5 .X ±0.3 .XX ±0.10	SCALE: FREE	CUSTOMER:		Approved by WEI MING			
				UNIT: mm							CUSTOMER P/N: CL401**
	00	NEW DOCUMENT	2019-11-28	Angle: X° ±3° .X° ±1°		REV.: 00	DWG. No.: T2019112802		TITLE: 28AWG CAT6A U/UTP PATCH CABLE		Design by NXL
	REV.	DESCRIPTION	DATE			SHEET	1/1				
	1	2	3	4		5	6	7			