

LABGEAR DAT103 Quick Guide

The Labgear DAT103 is pre loaded with the Australian Channel Plan as standard.

By following these simple steps you have the choice to load custom transmitter plans, therefore eliminating unwanted channels.

Channel Plans will be named by default as: NEW 1, NEW 2 etc. Using the control software you can rename these plans to actual transmitter or customized names.


Please refer to the instruction manual for complete detailed information.



1. When turning on the instrument, the default page is the Main menu for measurement. (Home)
2. By pressing the down arrow on the keypad, the second menu page: service information will be displayed.




3. Press F2 for data manager menu.




4. Press F1 for channel plan.




5. Make sure the signal from the transmitter is connected to the meter.
6. Press F3 to start scan.

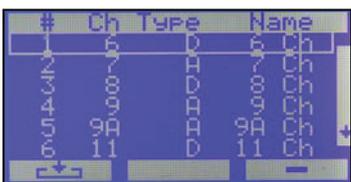


7. Once all channels have been scanned, you have the choice to "cut" unwanted channels. *To skip the "cut" function, go to step 11.*
8. To cut an unwanted channel, scroll down using the down arrow key and press F3 to cut.

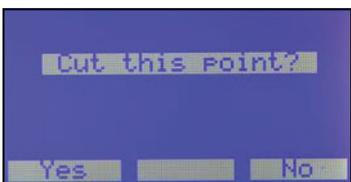

9. Press F1 to confirm cut.
10. Press F3 to decline cut.
11. After cutting, to save the channel plan, press the enter / return key.

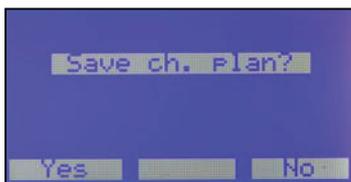

12. Press F1 to confirm saving of channel plan.
13. Press F3 to decline.



14. Press the enter / return key 2 times to return back to the main service information menu.
 15. Press the down arrow key for main measurement Menu. (You are now back at the Home page.)
- To create further channel plans, repeat steps 1-15.