


50 Ports ISDN Patch Panel



Materials :

Bottom Panel : Metallic Panel (SPCC)
 RJ-45 Jack : Housing-PBT /
 8P8C 6 micro inches gold plated /
 PCB : FR-4 / 1.6mm UL-94V0
 IDC Body : Fireproof ABS UL-94V0
 IDC Pin : Bronze & Tinned

IDC Description : For 22-26 AWG.




For 110 or Krone punch-down Tool

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
 Contact Resistance : 20m ohms (max.)
 Current Rating : 1.5 Amps .
 DC Resistance : 0.1 ohm (max.)
 Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)
 RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)
 Operation Temperature : -40 ~ +70 degree / C

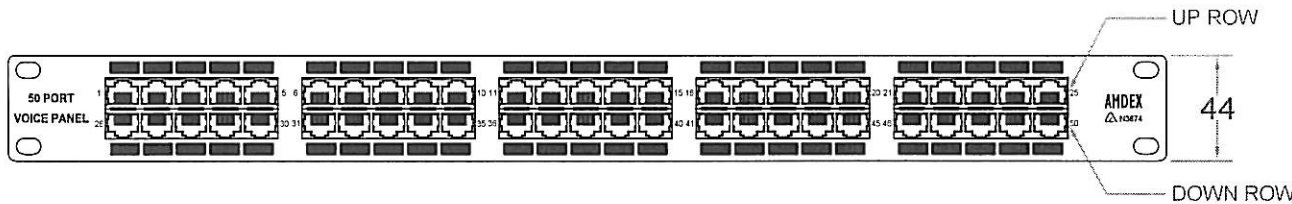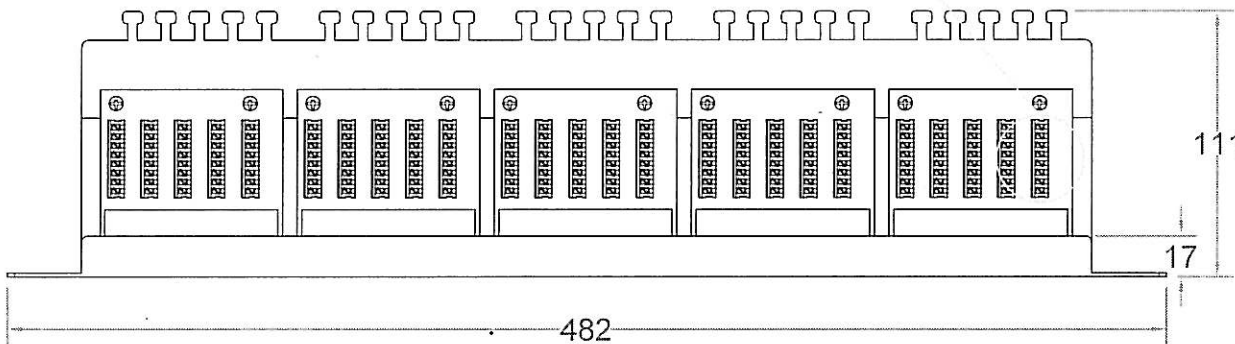

DRAW NO:			ITEM NO:	DTP50
	APPR	G.O.	CUSTOMER:	
UNIT: m/m	CHECK		DATE:	
SCALE:	DESIGN		TOLERANCE:	· ± 1 · X ± 0.2 · XX ± 0.15