

4. Installing the Fisheye Camera

4.1 Assembling the Fisheye Camera with the Dome Housing



Required accessories:


- GV-Mount903
-

1. Align the embossed arrow of the housing cap (GV-Mount903, No. 2) with the arrow inside the dome housing (GV-Mount903, No. 1) and secure them with three M6 screws (GV-Mount903, No. 4).



Tip: The flat hole on the housing cap should be fitted with the hole on the housing cover without any indent.

2. Thread the camera cable through the dome housing (GV-Mount903, No. 1).
3. Place the camera body to the dome housing. Make sure the camera cable is at the top of the dome housing arrow. Secure with three M4 screws (GV-Mount903, No. 3).

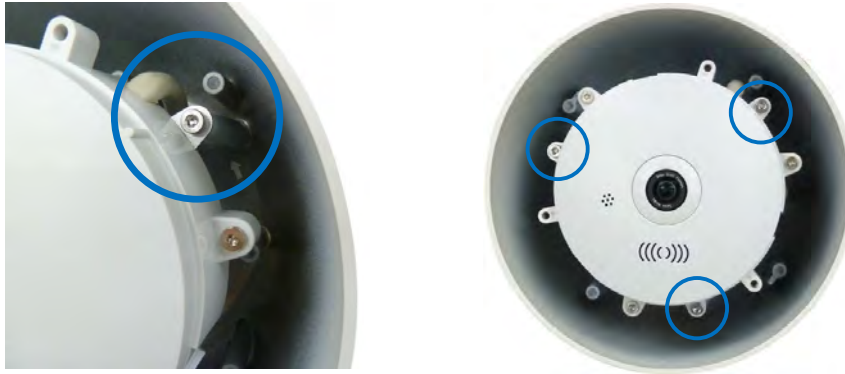

4. Place the camera cover for in-ceiling mount on the camera body and secure the 3 screws with the supplied torx wrench.



4.4 Wall Pendant Mount



Required accessories:

- GV-Mount200
- GV-Mount903

The user needs to prepare:

- Screws for wall x 4
-

1. Assemble the Fisheye camera with the dome housing. See *4.1 Assembling the Fisheye Camera with the Dome Housing*.
2. Insert the housing cap (GV-Mount903, No. 2) into the wall pendant tube (GV-Mount200, No. 1) and secure the tube to the end of the housing cap (GV-Mount903, No.2) with M6 screws (GV-Mount903, No. 4).



3. Place the wall pendant tube on the wall and secure with four screws of your choice.