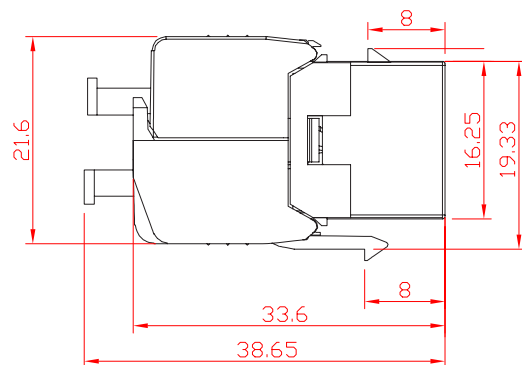
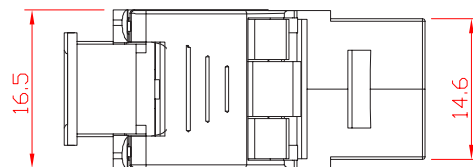

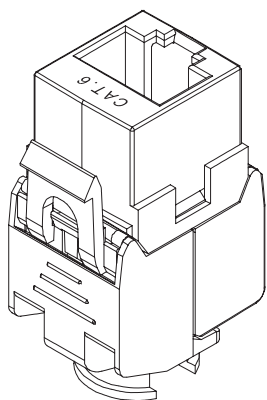


NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5AMP
3. CONTACT RESISTANCE: 100MILLIOHMS MAX
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40° TO +85°
2. OPERATION: 0° TO 70°

MECHANICAL:

1. THE SHELL MATERIAL: ZINC ALLOY
2. HOUSING MATERIAL: PC
3. INSERT MATERIAL: FAME RETARDANCY PBT
4. PCB MATERIAL: FR-4 T=1.6mm
5. CONTACT MATERIAL: PHOSPHOR BRONZE STAMP
PIN T=0.30mm
6. IDC CONTACT MATERIAL: PHOSPHOR BRONZE
T=0.50mm WITH TIN PLATING
7. RJ45 JACK ; LIFE: 750 TIMES MIN
8. IDC LIFE: 200 FTIMES MIN
9. WIRE: AWG 23-26



Wiretek