



Built for 24/7 CCTV display.

Flashview LED LCD surveillance monitors in 19, 24, 27 & 28 inch screens

The Flashview LED LCD monitors are the monitor of choice for 24/7 continuous surveillance displays, showing off cameras in up to 4K Ultra HD image resolution. With incredible digital processing with up to 1.07G colours for a vivid visual experience and fast response time for smooth operation with no blurring.

- Display footage at up to 4K Ultra HD / 8.0MP (3840 x 2160) image resolution
- Up to 1.07G colours for a realistic and vivid visuals
- Low response time for smooth operation
- VESA mountable and with adjustable bases
- Low energy consumption (<5W standby)
- Extra wide viewing angles 178° (H) x 178° (V)
- With built in speakers, audio outputs and video inputs (HDMI, VGA, DVI, composite & DP)
- Built to last with long expected lifespan








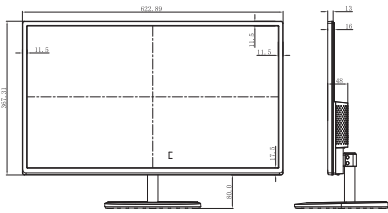
Up to 4K Ultra HD resolution



Built in speakers & video inputs



Realistic & vivid visuals

Specifications	18.5" LED LCD Monitor	23.8" Full HD LED LCD Monitor	27" Ultra HD LED LCD Monitor	28" Ultra HD LED LCD Monitor
Product Image				
Ordering Information	LCDFL19	LCDFL24	LCDFL27	LCDFL28
Screen Size	18.5 inch	23.8 inch	27 inch	28 inch
Aspect Ratio	16:9	16:9	16:9	16:9
Resolution	1366 x 768	2.0MP / 1080p (1920 x 1080p)	8.0MP / 4K (3840 x 2160)	8.0MP / 4K (3840 x 2160)
Display Panel	N/A	ADS / PLS	N/A	IPS
Brightness / Luminance	220cd/m ²	250cd/m ²	300cd/m ²	300cd/m ²
Contrast Ratio	600:1	1000:1	1000:1	1000:1
Display Colours	16.7M	16.7M	1.07G	1.07G
Viewing Angles	90° (H) / 65° (V)	178° (H) / 178° (V)	178° (H) / 178° (V)	170° (H) / 170° (V)
Response Time	5ms	14ms	14ms	5ms
Refresh rate	60Hz	N/A	60Hz	N/A
Inputs	1 x VGA	1 x VGA, 1 x HDMI	1 x DP, 2 x HDMI (HDMI 1.4)	1 x VGA / 1 x DVI / 1 x HDMI (HDMI 2.0) / 1 x Display port / 1 x Composite
Outputs	N/A	N/A	1 x Audio	2 x audio
Speakers	N/A	N/A	2 x 2w speakers	2 x 2.5W speakers
Power Input	12VDC	AC 100-240V 50/60Hz	12VDC	100~240 VAC / 50/60Hz
Power Consumption	20W (<5W standby)	20W	40W (<5W standby)	<35W (<5W standby)
VESA	100mm x 100mm	N/A	75mm x 75mm	200mm x 200mm
Tilt	N/A	-5° ~ 15°	N/A	N/A
Operating Temperature	0°C~40°C, <85%RH	0°C~40°C, <85%RH	0°C~40°C, <85%RH	0°C~40°C, <85%RH
Dimensions	446.8 x 276 x 39mm (without stand)	541.5 x 407.3 x 190mm (with stand)	622.9 x 367.3 x 48mm (without stand)	670 x 390 x 25mm (without stand) 670 x 455 x 195mm (with stand)
Net Weight	2.1kg	3.4kg	5kg	10kg
Included Accessories	VGA cable, power adapter, pedestal	HDMI cable, power adapter	HDMI cable, power adapter, pedestal	Power adapter, 2 x feet pedestal
Product Diagrams	 LCDFL19		 LCDFL27	

Your local Flashview professional: