





Phone: 02 9797 9866
Web: www.wes.net.au

Fax: 02 9716 6015
Address: 138 Liverpool Road, Ashfield, NSW, 2131
Email: sales@wes.net.au


Part NO : LED301-15-45

REV:A


2012-12-30



Light Distribution Curve

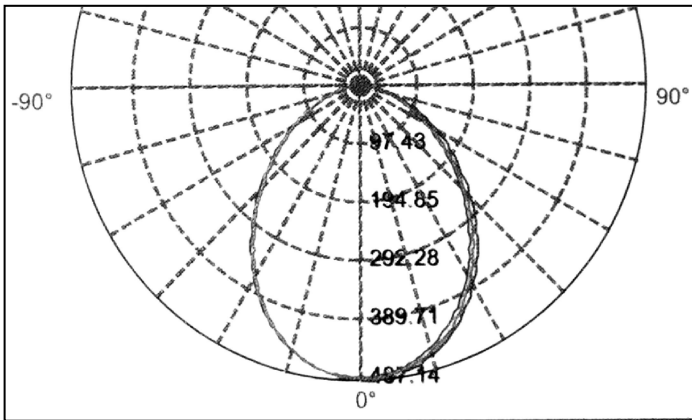

Lux-Distance Curve

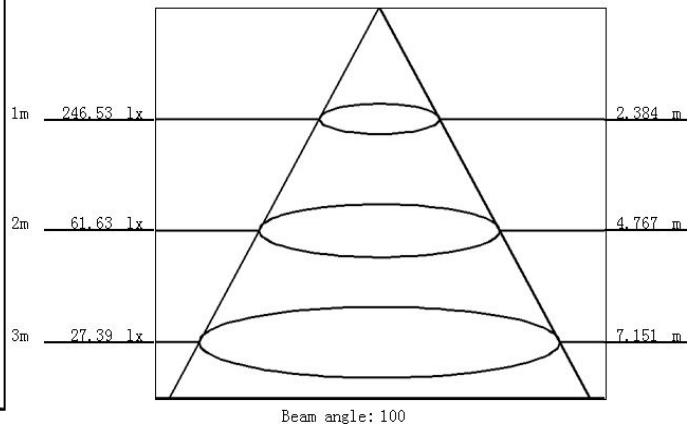

Characteristics and parameters

Input Voltage	AC85-265V
Frequency	50-60Hz
Power	15W
Power Factor	≥0.92
LED Type	BRIDGELUX High Power LED
Luminous Flux	1100lm±100lm
Illuminance	1m=246lx; 2m=61lx; 3M=27lx
Beam Angle	100°
Colour	2700K/3000K/4500K/6000K
CRI	≥80
Material	Al+ Glass(Frosted)
Size	D160*H75mm
Opencut	D150mm
N. W.	0.8kg
Package Size	200X200X100mm/BOX 620X420X420mm (24PCS) /CARTON
G. W.	21.0kg
Operation Temperature	-30~60°C
Warranty	1 year
Certificate	CE RoHS SAA