



KVM-0290 Version: 1

2-Port Cable KVM Switch, HDMI, USB

The KVM-0290 is a 2-port USB HDMI switch for home or small office use. The switch allows computers from a variety of operating platforms to connect to a single user-interface including a mouse, keyboard and monitor. Featuring keyboard hotkeys, the switch makes it easy to switch between computers and software with a single button push. The device also supports high-quality video of DDC2B and 1920x1200 pixels, as well as HDCP and High-Bandwidth Digital Content Protection. Furthermore, it provides auto-scanning features. The KVM switch is easily installed with Plug-and-Play capability, and powers itself through the USB connection. The device is manufactured with all cables pre-attached, so is ready for use straight out of the box, making it a very handy addition to any office.



1. Display Switch Button
2. USB Console Port
3. Video Console Port

4. Video PC Port
5. USB PC Port

Key Features

- Supports high-video quality – DDC2B and 1920x1200 pixels
- 2-port USB HDMI KVM Switch for home or office use
- Control and manage 2 computers by using a single USB keyboard, mouse and monitor
- Provides auto-scanning features
- Supports HDCP, High-Bandwidth Digital Content Protection
- Easy switching between computers with keyboard hotkeys
- Self powered through USB connection
- Simple Plug and Play installation

Specifications

System Specifications

Standards & Protocols:

Windows 98SE/ME/2000/XP/Vista/7/8/2003, Mac, Linux

Connectors and Cabling:

PC Port:

USB: 2 x Type A USB Connectors

Video: 2 x HDMI (male)

KVM Body: 3 x Video Connector (male)

Console Port:

Keyboard/Mouse: 2 x Type A USB Connectors (female)

Video: 1 x HDMI (female)

Button:

display switch button

Indicator:

Red for PC Selection

Green for PC ON-Line Selection

Resolution:

Resolution: 1920 x 1200

Cable Length 1.2 M

Power:

Power Input: By PC USB Power

Features

General:

Keyboard: 105 key usb keyboard

Management:

USB Keyboard Hot Key and Push button

Environment

Temperature (°C):

Operating: 0°C ~ 50°C

Storage: - 20°C ~ 60°C

Humidity (Non-condensing):

Storage: 10% ~ 90%

Operating: 10% ~ 90%

Physical Specifications

Dimensions (W x D x H mm):

65 x 85 x 25 mm

Weight (g):


330 g

Others

Approval and Compliance:

CE, FCC

Diagram

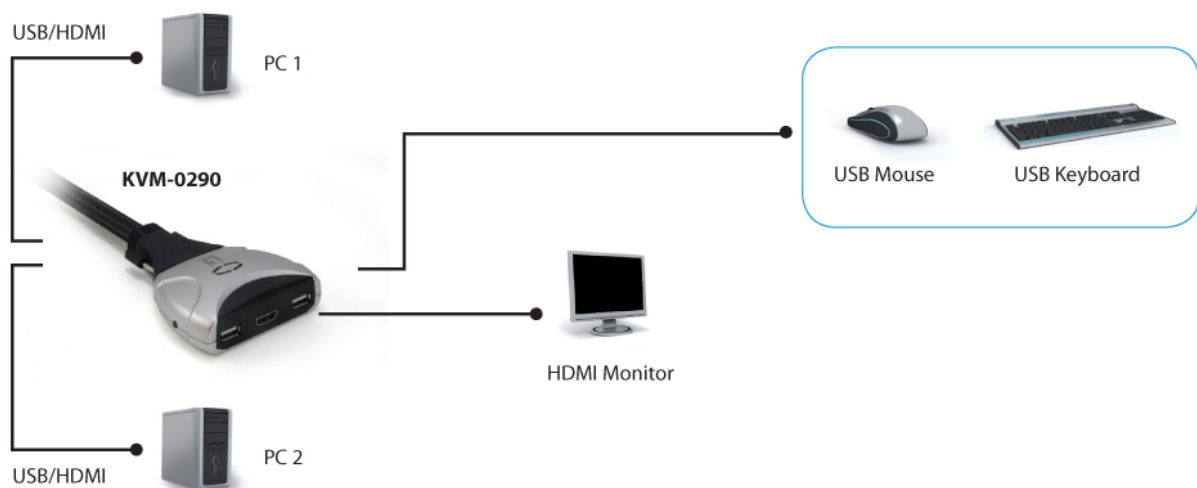

Order Information

KVM-0290

Package Contents

KVM-0290
User Manual
KVM Cable