



POW-2411


30W 24VDC Industrial Power Supply, DIN-rail -30 to 70C

The POW-2411 is a DIN-rail industrial power supply is ruggedized, universal input voltage range and full compliance with all important safety and EMC standards. It can be operated at full load across an ambient temperature range of -30 to 70 Celsius degree without need of additional cooling to guarantee quality for harsh industrial environment.

Features

- Universal AC Input at Full Range
- Short Circuit, Overload / Over Voltage Protection
- Fanless Design
- DIN rail installation
- Isolation Class II
- 100% Full Load Burn-in Test

Diagrams

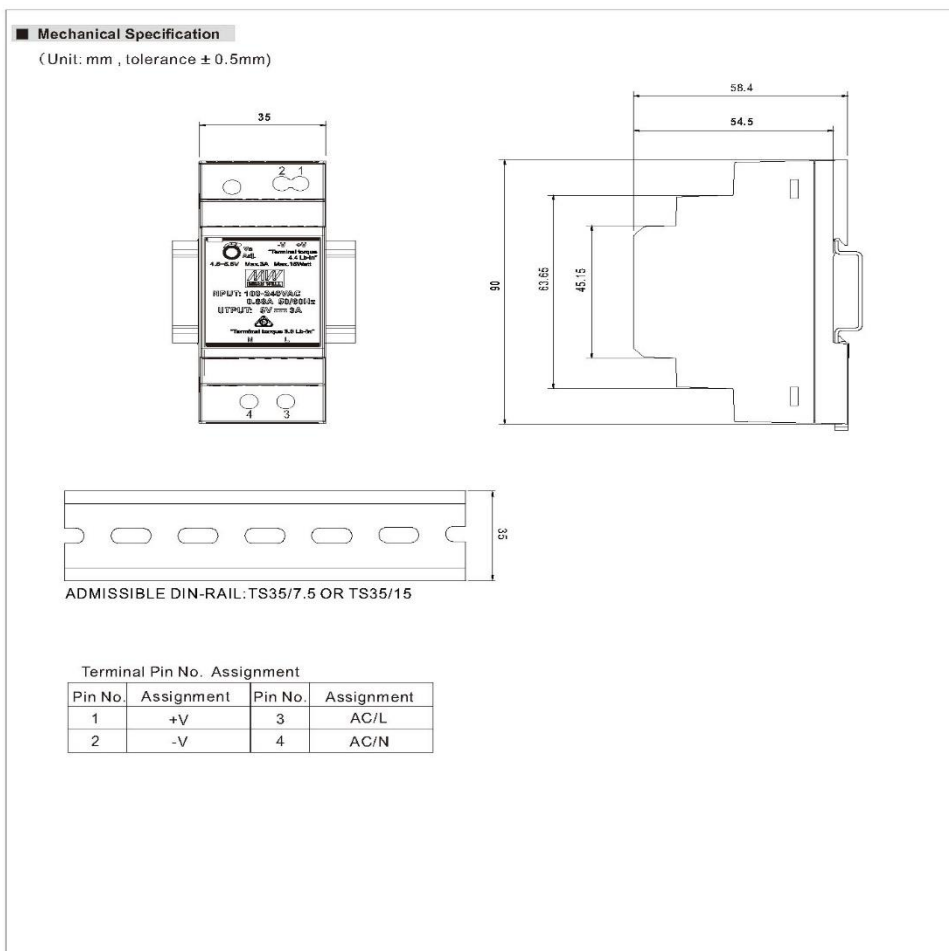

Specifications

Output DC	24V	Dimension & Weight	35*90*54.5mm (W*H*D) @ 0.12kg
Output Current	1.5A	Operation Temperature	-30 ~ +70°C (Refer to "Derating Curve")
Output Power	36W	Operation Humidity	20 to 90% RH Non-condensing
Input Voltage	85-264VAC or 120-370VDC	Safety Approval	UL60950-1, UL508, TUV EN61558-2-16, IEC60950-1, EAC TP TC 004, BSMI CNS14336-1 approved; Design refer to TUV EN60950-1, EN55024, EN55035, EN61000-6-2, EN61204-3
MTBF	968.1K hrs min. MIL-HDBK-217F (25°C)		

Order Information

POW-2411 - 30W 24VDC Industrial Power Supply, DIN-rail -30 to 70C

Package Contents

POW-2411