



POW-2421

60W 24VDC Industrial Power Supply, DIN-rail -30 to 70C

The POW-2421 is a DIN-rail industrial power supply is ruggedized, universal input voltage range and full compliance with all important safety and EMC standards. It can be operated at full load across an ambient temperature range of -30 to 70 Celsius degree without need of additional cooling to guarantee quality for harsh industrial environment.


Features

- Universal AC Input at Full Range
- Short Circuit, Overload / Over Voltage Protection
- Fanless Design
- DIN rail installation
- UL508 Approval
- Isolation Class II
- 100% Full Load Burn-in Test

Diagrams

Mechanical Specification

(Unit: mm , tolerance ± 0.5 mm)

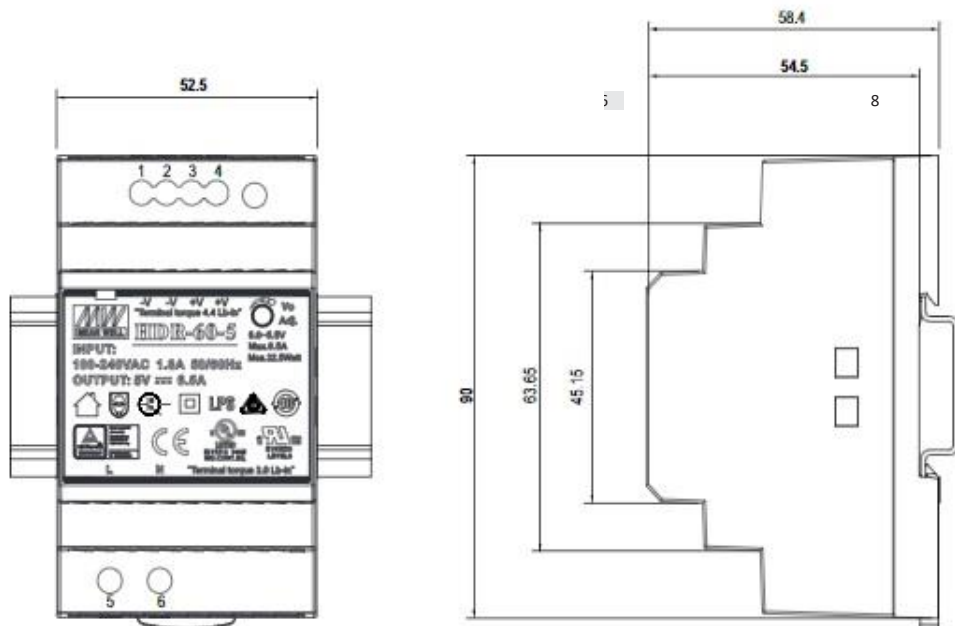

Specifications

Output DC	24V
Output Current	2.5A
Output Power	60W
Input Voltage	85-264 VAC & 124-370 VDC
MTBF	927.6K hrs min. MIL-HDBK-217F (25)

Dimension & Weight	52.5 x 90 x 54.5 mm @ 190 g
Operation Temperature	-30 to 70 Celsius
Operation Humidity	20 to 90% RH Non-condensing
Safety Approval	UL60950-1, UL508, TUV EN61558-2-16, IEC60950-1, BSMI CNS14336-1 aEAC TPTC 004approved; Design refer to TUV EN60950-1

Order Information

POW-2421 - 60W 24VDC Industrial Power Supply, DIN-rail -30 to 70C

Package Contents

POW-2421