

SFP-3001 Version: 3

1.25Gbps Multi-mode SFP Transceiver, 500m, 850nm

LevelOne SFP-3001 is a high performance and cost-effective multi-mode SFP transceiver. Intended for use with Gigabit Ethernet, it provides up to 1.25 Gbps bi-directional data transfer rate on a single duplex fiber core. For use with 50 and 125 micron fiber cables, it can reach a distance of up to 500 meters. The SFP-3001 transceiver operates using a wavelength of 850nm with a VCSEL Laser Diode light source and has an LC port.

Key Features

- Supports Digital Diagnostics Monitoring Interface (DDMI) for easy status monitoring
- Provides duplex LC connector
- 3.3V Single power supply
- IEEE 802.3z Gigabit Ethernet compliant
- Hot-swappable
- RoHS compliant and Lead Free
- Operating temperature: 0°C to 70°C

Specifications

System Specifications

Standards:

- IEEE 802.3z Gigabit Ethernet.
- 1000Base-SX
- SFP Multi-Sourcing Agreement(MSA)
- SFP MSA SFF-8074i Compliant

Port:

Duplex LC Connector, multi-mode fiber(SMF)

Wavelength (nm):

850nm VCSEL Laser Diode

Optical Receive Sensitivity:

-18 to 0dBm±3dB

Optical Link Power Budget:

18dB

Power Input:

2.97 to 3.63V±3%

**Power Consumption:**

<800mW

Data Rate:

1.25 Gbps Bi-directional data link

Optical Transmission Power:

-9 to -4dBm±3dB

Features**General:**

Hot-swappable

Management:

DDMI (Digital Diagnostics Monitoring Interface)

Performance**Operating Distance:**

Up to 500m on 50/125µm MMF

Environment**Operating Temperature (°C):**

0° ~ 70°C

Operating Humidity (Non-condensing):

0~85%

Storage Temperature (°C):

-40° ~ 85°C

Physical Specifications**Dimensions (W x D x H mm):**

14 x 57 x 8.5 mm

Weight (g):

20g

Approval and Compliance**EMI/EMS:**

IEC 61000-4-3 / IEC 61000-4-2 , MIL-STD-883 Method 3015

Safety:

-EMI compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B.

-Class 1 Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC)60825-1,2





Environmental Test:

RoHS compliant with 2002/95/EC 4.1&4.2 2005/747/EC.

Others:

DDMI

Diagram

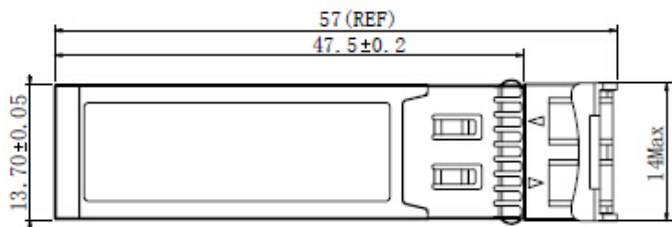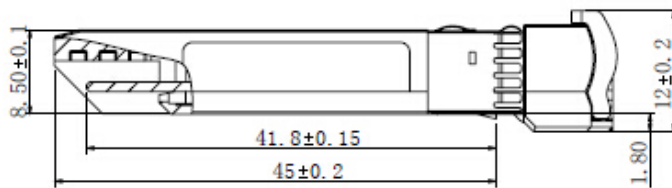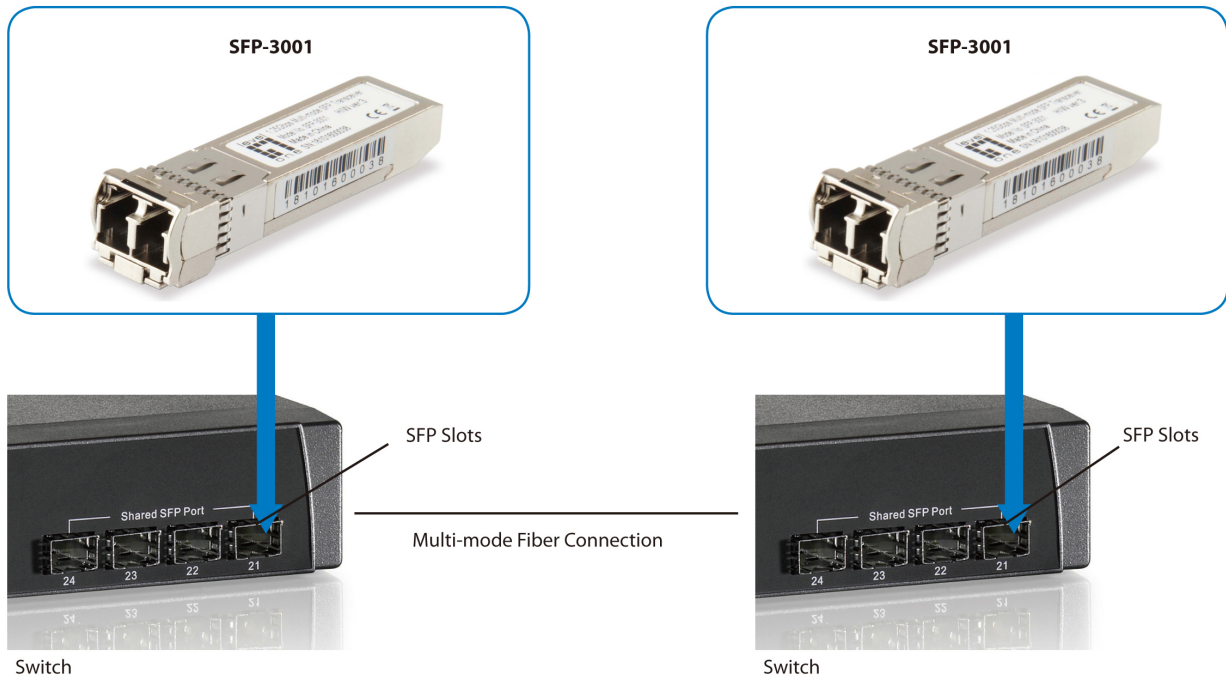

Measurement Unit : mm

Order Information

SFP-3001

Package Contents

SFP-3001

No liability or responsibility for any errors or omissions in the content.
 Specifications are subject to change without notice.
 All mentioned brand names are registered trademarks and property of their owners.
 Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.