


SFP-3211 Version: 3

1.25G Single-mode SFP Transceiver (10km)

LevelOne SFP-3211 is a high performance and cost-effective single-mode SFP transceiver. Intended for use with Gigabit Ethernet, it provides up to 1.25 Gbps bidirectional data transfer rate on a single duplex fiber core. For use with 9 micron fiber cables, it can reach a distance of up to 10km. The SFP-3211 transceiver operates using a wavelength of 1310nm with a FP Laser Diode light source and has a LC connector.

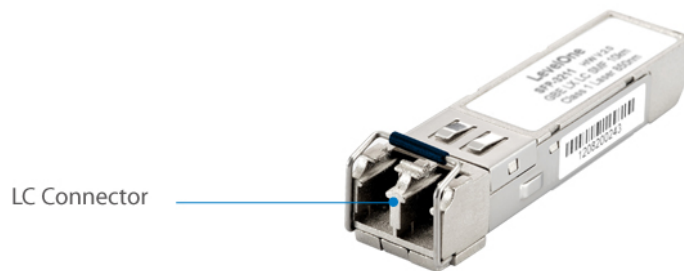

Key Features

- 1310nm FPLD
- Data Rate: 1.25Gbps, NRZ
- Single +3.3V Power Supply
- RoHS Compliant and Lead-free
- AC/DC Differential Electrical Interface
- Compliant with Multi-Source Agreement (MSA)
- Duplex LC Connector
- Compliance with specifications for IEEE-802.3z Gigabit Ethernet at 1.25Gbps
- Compliance with ANSI specifications for Fiber Channel applications at 1.06Gbps
- No configuration or installation software required
- Eye Safety Designed to meet LASER Class 1 comply with EN60825-1

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3z Gigabit Ethernet
SFP Multi-Sourcing Agreement(MSA)

**Connectors and Cabling:**

Duplex LC Connector, Single-mode fiber(SMF)

Wavelength(nm):

1310nm FP Laser Diode

Optical Receive Sensitivity:

-21 dBm

Power Budget:

11.5 dB

Power:

Supply Voltage: 3.3V

Max Voltage/Current: 6V/300mA

Features**General:**

Hot-swappable

PoE:

Power Budget: 11.5dB

Performance**Data Transfer Rate:**

1.25 Gbps Bi-directional data link

Operating Distance:

up to 10km (9/125?m)

Fiber channel up to 1.06Gbps

Optical Transmission Power:

-9.5 ~ -3 dBm

Environment**Temperature (°C):**

Operating: 0°C ~ 70°C

Storage: -40 ~ 85°C

Humidity (Non-condensing):

5 ~ 95%

Physical Specifications**Dimensions (W x D x H mm):**

13.7 x 56.5 x 8.95 mm

Weight (g):


20g

Others**Approval and Compliance:**

Class 1 eye safety and comply with EN 60825-1

CE, FCC, RoHS

Diagram

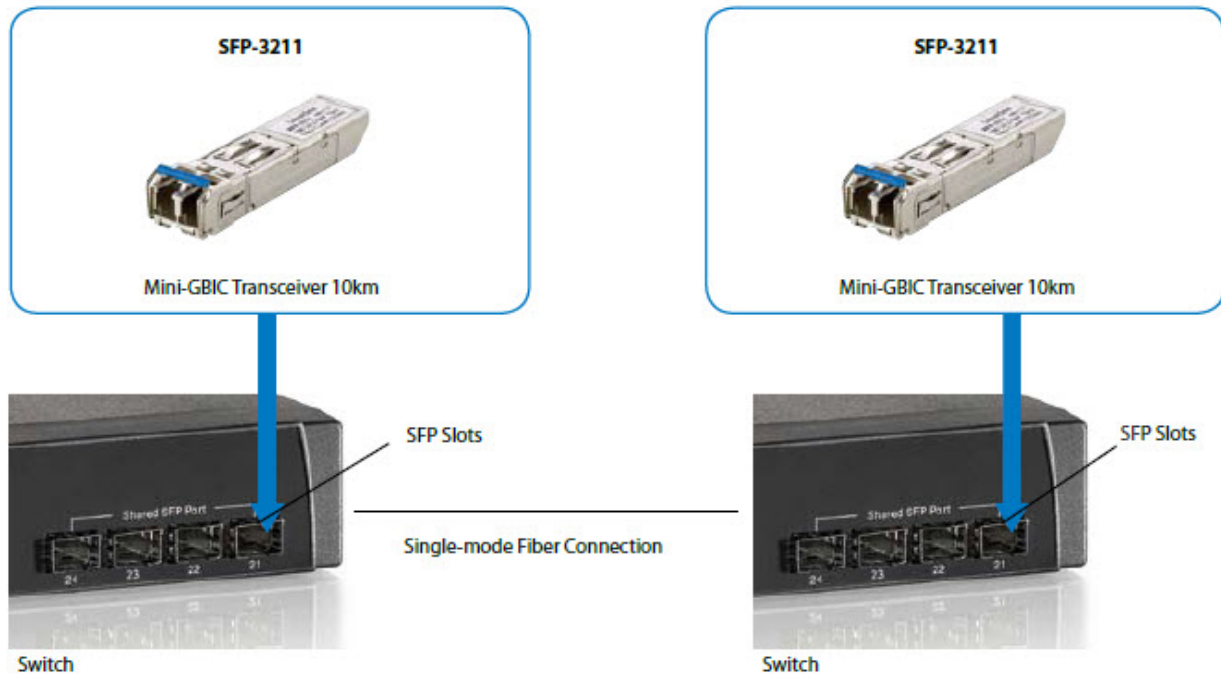

Order Information

SFP-3211

Package Contents

SFP-3211