

- No re-wiring needed for T8 fluorescent tube fixtures with starter and choke/coil ballast (CCG type T8 fluorescent)
- LED starter included as a set
- 5.8GHz microwave sensor technology
- 5000K CCT Daylight
- 30 seconds full power output when activated
- 20% standby lighting
- 80kWh energy saving per year (assuming the tube is activated 30% of the time)



Order Code 65493

General Data

Lamp Socket G13
Design Glass diffuser

Geometric Data

Length (mm) 1198mm
Diameter (mm) 29mm
Weight (g) 310g



Electric Data

Wattage 18 W
Voltage 100-240 V AC
Power Factor ≥ 0.9
Operating Frequency 50/60 Hz

Photometric Data

Luminous Flux (lm) 1800
CRI ≥ 80
CCT 5000 K – daylight
Luminous Intensity (cd) 550Cd
Beam Angle (°) 140°
Lifetime 30,000 hrs

Equivalent to (W) 36 W

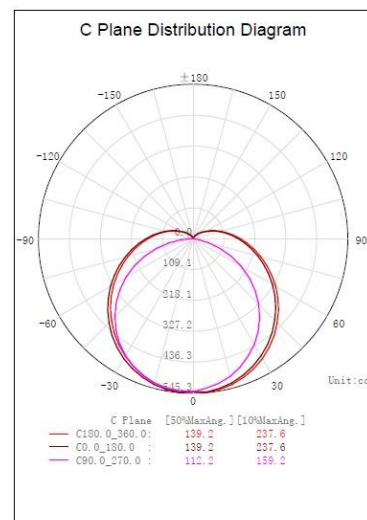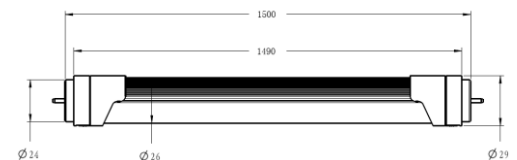



Order Code	65493
Product Description	Verbatim Sensor LED T8 18W 1200mm 5000K Daylight 2000lm with LED starter

Technical Packaging Details

Giftbox Barcode	6943760254938
Inner Carton Barcode	16943760254935
Outer Carton Barcode	26943760254932
Pack Dimensions (LxWxH)	1288mm x 35mm x 35mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	30
Carton Dimensions (LxWxH)	1345mm x 193mm x 240mm
Cartons/Layer	TBC
Layers/Pallet	TBC
Units/Pallet	TBC