



- Compliant to Australia Electrical Equipment Safety System Compliance Level III
- Perfect for replacing traditional 36W 1200mm T8 fluorescent tube
- No re-wiring needed for T8 fluorescent tube fixtures with starter and choke/coil ballast (CCG type T8 fluorescent)
- Single end power supply
- Shatter proof
- 50% power saving over T8 fluorescent tube
- Flickering-free
- LED starter included as a set
- UV- and IR-free light for less heat and protection for heat sensitive objects



Order Code	65784
General Data	
Lamp Socket	G13
Design	Double sheath shatter proof diffuser , Plastic over glass
Geometric Data	
Length (mm)	1198mm
Diameter (mm)	27.5mm
Weight (g)	215g
Electric Data	
Wattage	18 W
Voltage	100-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz
Photometric Data	
Luminous Flux (lm)	1800
CRI	≥80
CCT	6500 K – Daylight
Luminous Intensity (cd)	360Cd
Beam Angle (°)	200°
Lifetime	30,000 hrs
Equivalent to (W)	36 W

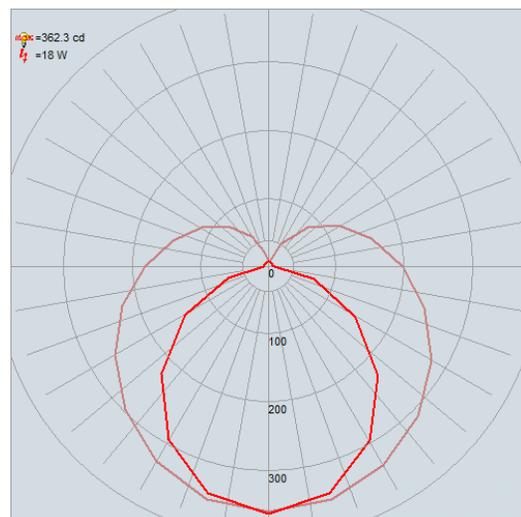



Order Code

65784

Product Description

Verbatim LED CCG T8 18W 1200mm 6500K Daylight
1800lm with LED starter (AU version)

Technical Packaging Details

Giftbox Barcode	6943760257847
Inner Carton Barcode	16943760257844
Outer Carton Barcode	26943760257841
Pack Dimensions (LxWxH)	1289mm x 33mm x 33mm
Pack Weight	300g
Carton Qty (Shipping Unit)	10
Carton Dimensions (LxWxH)	1335mm x 180mm x 90mm
Cartons/Layer	5
Layers/Pallet	10
Units/Pallet	500