


- PMMA Light Guide Plate employed, stay clear after years' of installation
- Flicker-free
- Lifetime of 40,000 hrs
- 5000K CCT Daylight
- 110° beam angle
- DALI driver options available
- Surface mount and suspended installation accessories available



Order Code	65819
General Data	
Lamp Socket	NA
Design	PMMA Light Guide Plate
Geometric Data	
Length (mm)	1195x295mm
Cut-hole (mm)	1180x280mm
Weight (g)	TBC
Electric Data	
Wattage	40W
Input Current	1000mA
Voltage	27-42 V DC
Power Factor	≥0.9
Operating Frequency	DC
Photometric Data	
Total Luminous Flux (lm)	3600lm
90° cone Luminous Flux (lm)	N/A
CRI	≥80
CCT	5000 K – Daylight
Luminous Intensity (cd)	1300
Beam Angle (°)	110°
Lifetime	40,000 hrs

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

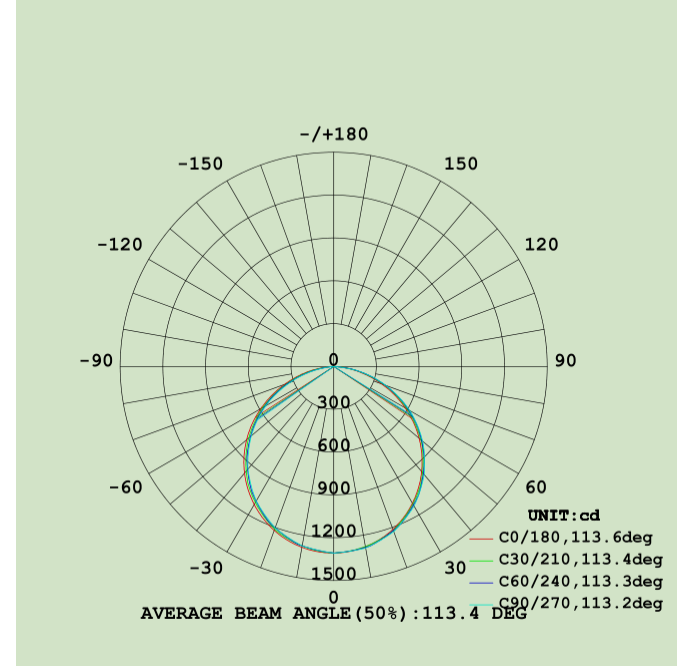



Order Code	65819
Product Description	Verbatim LED slim panel 1195x295x11mm 40W 5000K Daylight 3600lm DC 27-42V 1000mA

Technical Packaging Details

Giftbox Barcode	6943760258196
Inner Carton Barcode	16943760258193
Outer Carton Barcode	26943760258190
Pack Dimensions (LxWxH)	1218 mm x 355 mm x 34 mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	6
Carton Dimensions (LxWxH)	1235 mm x 375 mm x 190 mm
Cartons/Layer	5
Layers/Pallet	2
Units/Pallet	60