




- Perfect for replacing traditional 36W 1200mm T8 fluorescent tube
- No re-wiring needed for T8 fluorescent tube fixtures with starter and choke/coil ballast (CCG type T8 fluorescent)
- Single end power supply
- Shatter proof
- 61% power saving over T8 fluorescent tube
- High Efficacy 150lm/W
- LED starter included as a set
- UV- and IR-free light for less heat and protection for heat sensitive objects

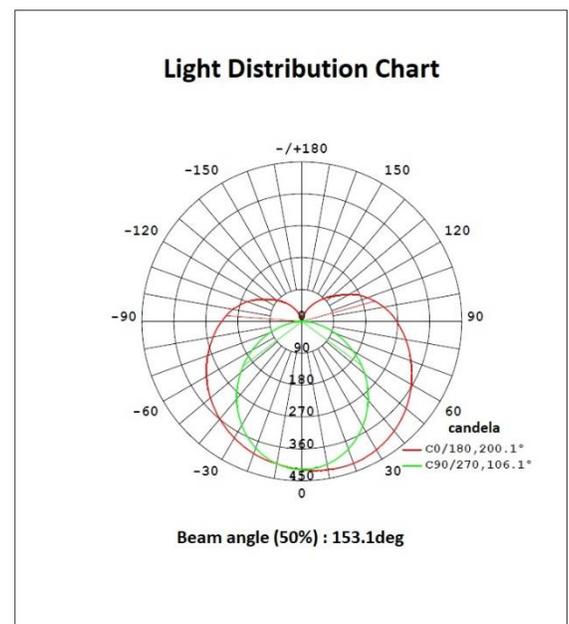

Order Code	66211
General Data	
Lamp Socket	G13
Design	Double sheath shatter proof diffuser , Plastic over glass
Geometric Data	
Length (mm)	1198mm
Diameter (mm)	25mm
Weight (g)	184g
Electric Data	
Wattage	14 W
Voltage	100-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz
Photometric Data	
Luminous Flux (lm)	2100
CRI	≥80
CCT	6500 K – Daylight
Luminous Intensity (cd)	420Cd
Beam Angle (°)	220°
Lifetime	30,000 hrs
Equivalent to (W)	36 W



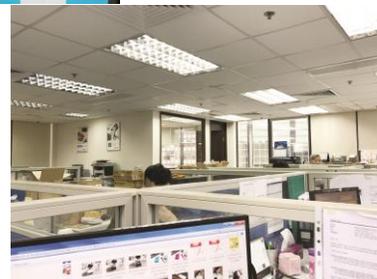

Order Code

66211

Product Description

Verbatim LED CCG T8 14W1200mm 6500K Daylight
2100lm with LED starter

Technical Packaging Details

Giftbox Barcode	6943760262117
Inner Carton Barcode	N/A
Outer Carton Barcode	26943760262111
Pack Dimensions (LxWxH)	1285mm x 30mm x 30mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	10
Carton Dimensions (LxWxH)	1302mm x 170mm x 78mm
Cartons/Layer	TBC
Layers/Pallet	TBC
Units/Pallet	TBC