

Verbatim™ 3-CCT Integrated Downlight (Deep Recessed)

Technology you can trust

IC-4 10W 3000K/4000K/5700K 700-900lm dimmable

- 3-CCT (3000K/4000K/5700K) selectable
- Switch on the back to select CCT
- 10W, 700-900lm
- Equipped with 2-pin Australia AS3112 plug, ready to plug-in
- Triac dimmable
- IC-4 insulation rated, can be covered by insulating material during insulation
- 90° beam angle
- Lifetime 40,000 hrs



Order Code 66324

General Data

Lamp Socket Integrated downlight
Design Deep Recessed diffuser

Geometric Data

Height (mm) 83.4mm (including LED driver)
Diameter (mm) 115mm
Weight (g) TBC


Electric Data

Wattage 10W
Voltage 220-240 V AC
Power Factor ≥ 0.9
Operating Frequency 50/60 Hz


Photometric Data


Total Luminous Flux (lm) 700-900lm
90° cone Luminous Flux (lm) N/A
CRI ≥ 80
CCT 3000K/4000K/5700K
Luminous Intensity (cd) TBC (measured at 4000K)
Beam Angle (°) 90°
Lifetime 40,000 hrs

Equivalent to (W)

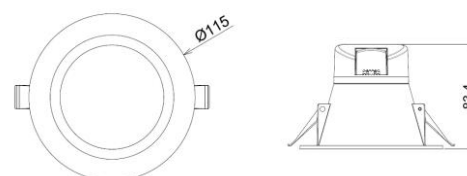

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

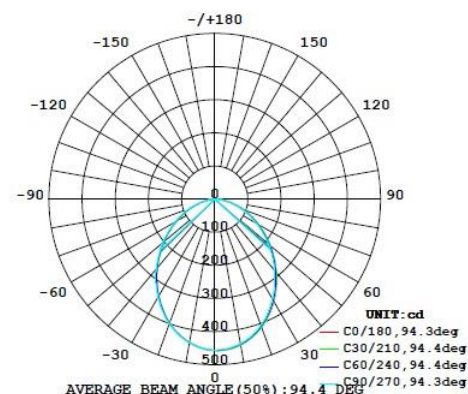

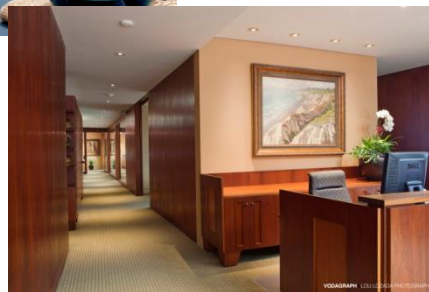

Order Code

66324

Product Description

Verbatim LED recessed downlight (deep recessed diffuser) 10W
CCT selectable 700-900lm with AU plug (90/115mm)

Technical Packaging Details

Giftbox Barcode	6943760263244
Inner Carton Barcode	N/A
Outer Carton Barcode	26943760263248
Pack Dimensions (LxWxH)	125 mm x 125 mm x 93 mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	30
Carton Dimensions (LxWxH)	390 mm x 265 mm x 490 mm
Cartons/Layer	12
Layers/Pallet	2
Units/Pallet	720