

- 3-CCT (3000K/4000K/5700K) selectable
- Deep recessed diffuser to reduce glare
- Extra wide rim front ring design
- Switch on the back to select CCT
- 20W, 1900-2100lm
- Equipped with 2-pin Australia AS3112 plug, ready to plug-in
- Triac dimmable
- IC-4 insulation rated, can be covered by insulating material during insulation
- 90° beam angle
- Lifetime 40,000 hrs



Order Code 66327

General Data

Lamp Socket Integrated downlight

Design Deep Recessed diffuser

Geometric Data

Height (mm) 132.5mm (including LED driver)

Diameter (mm) 240mm

Weight (g) TBC

Electric Data

Wattage 20W

Voltage 220-240 V AC

Power Factor ≥ 0.9

Operating Frequency 50/60 Hz

Photometric Data

Total Luminous Flux (lm) 1900-2100lm

90° cone Luminous Flux (lm) N/A

CRI ≥ 80



CCT 3000K/4000K/5700K

Luminous Intensity (cd) TBC (measured at 4000K)

Beam Angle (°) 90°

Lifetime 40,000 hrs

Equivalent to (W)

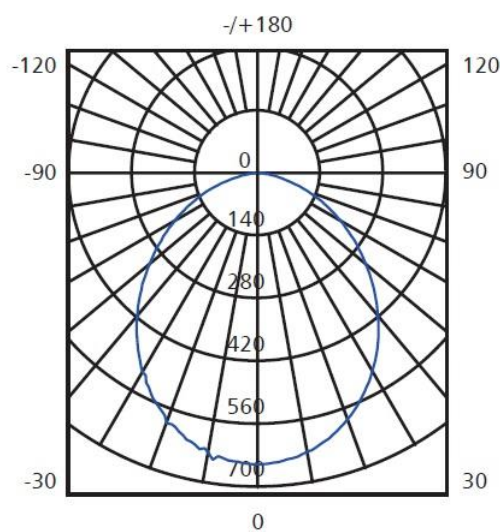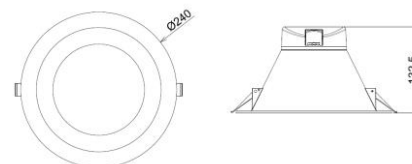

UNIT: cd
AVERAGE BEAM ANGLE(50%): 97.9 DEG





Order Code

66327

Product Description

Verbatim LED recessed downlight (deep recessed) 20W
CCT selectable 1900-2100lm with AU plug (205/240mm)

Technical Packaging Details

Giftbox Barcode	6943760263275
Inner Carton Barcode	N/A
Outer Carton Barcode	26943760263279
Pack Dimensions (LxWxH)	250 mm x 250 mm x 143 mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	12
Carton Dimensions (LxWxH)	515 mm x 515 mm x 450 mm
Cartons/Layer	4
Layers/Pallet	2
Units/Pallet	96