A Series and a series of

AC1200 Wireless Dual Band Router Model: AC10

Highlights

MERCUSYS[°]

- Enhanced Signal High gain antennas dramatically increase the strength and stability of the wireless signal
- Fast Wireless Speed Ideal for HD streaming, online gaming, and large file downloads
- Easy Installation Intuitive webpage guides you through the setup process in minutes



MERCUSYS°

Applications





Ideal for average Internet users seeking fast downloads, seamless streaming audio, uninterrupted streaming video, and lag-free online gaming

Features

minutes



Ease of Use The simple three-step setup allows you to complete installation in



Parental Controls Establish appropriate policies to protect children with responsible, safe internet access



IPTV Supported Supports IGMP Proxy/Snooping, Bridge, and Tag VLAN to optimize IPTV streaming



Guest Network Provides a separate network for guests to ensure your security and privacy



Quality of Service Prioritizes devices you select to perform better



IPv6 Supported Allows you to enjoy IPv6 services provided by your ISP and visit IPv6 websites


MERCUSYS°

Broader Wi-Fi Coverage

Four powerful high-gain antennas cast Wi-Fi signals to every corner of your home. Beamforming detects your connected devices and concentrates wireless signal strength towards them, making your connections more stable.[†]


MU-MIMO Technology

With MU-MIMO, AC10 communicates with multiple devices at the same time to allow connected devices to achieve faster speeds than standard AC routers, increasing overall network throughput.^{\ddagger}

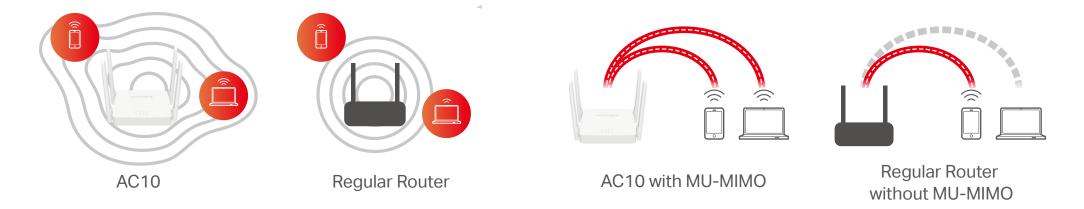

High Speed Dual-Band Wi-Fi for Lag-free Work and Entertainment


With the powerful 802.11ac technology, the AC10 lets your PC or smartphone enjoy 3X faster connections than 802.11n. Combining 300 Mbps 2.4 GHz (perfect for surfing and emailing) and 867 Mbps 5 GHz (ideal for HD streaming and gaming), you have the flexibility to allocate your devices to dedicated networks to do more at the same time.

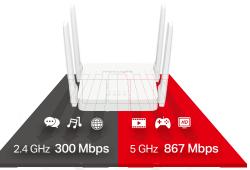

Specifications

Hardware

Ethernet Ports $1 \times 10/100$ Mbps WAN Port $2 \times 10/100$ Mbps LAN Ports Button Reset/WPS Button External Power Supply 9V/0.85ADimensions (W x D x H) $4.5 \times 3.7 \times 1.0$ in (114 × 94 × 26 mm) Antenna 4×5 dBi Fixed Omni-Directional Antennas

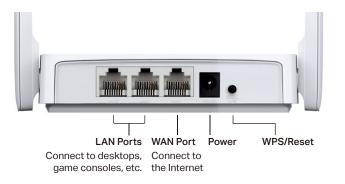

Wireless

Wireless Standards IEEE 802.11ac/n/a 5 GHz, IEEE 802.11b/g/n 2.4 GHz Frequency 2.4 GHz, 5 GHz Signal Rate Up to 300 Mbps on 2.4 GHz, 867 Mbps on 5 GHz EIRP 2.4 GHz < 20 dBm (EIRP) 5 GHz < 23dBm (EIRP) **Reception Sensitivity** 11g 6Mbps: -96dBm 11g 54Mbps: -78dBm 11n HT40 MCS7: -74dBm 11n HT20 MCS7: -71dBm 11a 6Mbps: -97dBm 11a 54Mbps: -79dBm 11ac VHT20 MCS8: -74dBm 11ac VHT40 MCS9: -70dBm

11ac VHT80 MCS9: -65dBm

Wireless Function

Enable/Disable Wireless Radio, WMM Security Features

- Simple Parental Controls
- Guest Network Access
- Wireless Security: WEP, WPA / WPA2, WPA-PSK / WPA2-PSK
- Firewall Protection

Specifications

Software

Operation Modes: Router Mode, Access Point Mode WAN Type Dynamic IP/Static IP/PPPoE/L2TP/PPTP DHCP Server, DHCP Client List NAT Forwarding Port Forwarding, Port Triggering, UPnP, DMZ Management Access Control Local Management Remote Management **Firewall Security** SPI Firewall, IP and MAC Address Binding **Guest Network** 2.4 GHz Guest Network, 5 GHz Guest Network

Others

Package Contents AC1200 Wireless Dual Band Router AC10 Power Adapter Quick Installation Guide RJ45 Ethernet Cable Environment • Operating Temperature: 0°C~40°C (32°F~104°F) • Operating Humidity: 10%~90% Non-Condensing • Storage Humidity: 5%~90% Non-Condensing

Specifications are subject to change without notice. MERCUSYS is a registered trademark of MERCUSYS TECHNOLOGIES CO., LTD. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright © 2020 MERCUSYS TECHNOLOGIES CO., LTD. All rights reserved.

[†]Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage, and number of connected devices are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

[‡]Use of MU-MIMO requires clients to also support MU-MIMO.

www.mercusys.com