



Superb footage over coax.


Professional Series: Motorised lens HDCVI domes available in 2.0MP

A excellent camera in all conditions with a wide range of compatible brackets, Professional Series domes from Securview offer easy adjustments via a motorised lens, all in a durable housing and low light colour footage.

- Stream up to 2.0MP (1920 × 1080) at 25fps
- 2.7~13.5mm motorised varifocal lens with fixed iris
- Smart infrared illumination, up to 60m range
- Supports audio signal via coaxial cable
- HDCVI / TVI / AHD / Analog switchable (DIP switch)
- Superb low light colour images as low as 0.001lx
- True WDR (130dB) and 3D noise reduction
- Dual voltage compatible: 12VDC and 24VAC
- IP67/IK10 for weather and vandal resistance
- 2.7 ~ 13.5mm fixed lens with 108° viewing angle



Switch Camera to Suit DVR

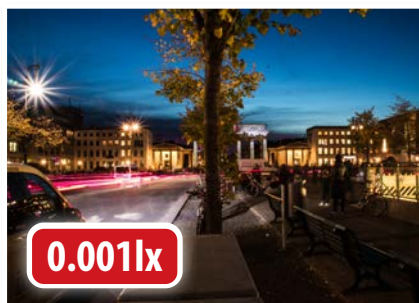

Superb Low Light Performance



Dual Voltage Compatible

Model		CAM669		
Camera	Image Sensor	2.0 Megapixel CMOS		
	Effective Pixels	1920 (H) × 1080 (V)		
	Signal Noise Ratio	> 65dB		
	Lens	2.7 ~ 13.5mm F1.5 Motorised Lens; Fixed Iris		
	Angle of View	108° ~ 30° (H) / 56° ~ 17° (W)		
	Focus	Auto/Manual / 0.8m Min. Focus Distance		
	Minimum Illumination	0.001Lux/F1.5, 30IRE, 0Lux IR Active		
	Electronic Shutter	1/25s ~ 1/100,000 s		
	Day/Night	Auto (ICR)		
	Infrared Range	60m		
	White Balance	Auto		
	Noise Reduction	3D NR		
	Gain Control	Auto / Manual		
	Lighting Compensation	BLC / HLC / WDR (130dB)		
Video	Resolution	1080p (1920 × 1080) to 960H (960 × 576/960 × 480)		
	Frame Rate	25fps (1080p and lower)		
	Transmission Distance	Audio signal transmission over coaxial cable (performed in ideal test conditions)		
DORI	DORI Distance	Detect	44m	
		Observe	18m	
		Recognise	9m	
		Identify	4m	
Interface	Audio Input	1 channel built-in microphone		
	Alarm Interface	N/A		
	Video Output	1 x CVI / TVI / AHD / CVBS by one BNC port (DIP Switch)		
	OSD Menu	N/A		
Environmental	Ingress Protection	IP67		
	Vandal Resistant	IK10		
	Housing	Metal		
	Power Input	12VDC / 24VAC		
	Power Consumption	< 9.9W		
	Dimensions	Ø126 x 100mm		
Weight	0.65kg			
Operating Environment	-30° to 60°C / RH90% (max)			
Application	Dimensions			
			Junction Box	Wall Mount
			MB1021, MB1048	MB1043
			Pole Mount	Ceiling Mount
		MB1043 + MB1027	MB1060 + MB1057	

Your local Securview™ HDCVI solutions professional: