


AV1300 Gigabit Passthrough Powerline Starter Kit

Smooth Ultra HD Streaming in Every Room







Highlights

HomePlug AV2 Standard Compliant

The HomePlug AV2 standard creates high-speed data transfer rates of up to 1300Mbps to support all your online activities.

HomePlug AV 600Mbps
HomePlug AV2 1300Mbps

Gigabit Ethernet for Fast Connections

The Gigabit Ethernet ports provide reliable high-speed wired connections for your game console, smart TV, STB and more.



Highlights

2 x 2 MIMO for More Throughput over Powerline

2 x 2 MIMO technology is like adding an extra lane on a highway. It establishes multiple simultaneous connections so you can enjoy 2x speeds and greater stability.

SISOSingle-In-Single-Out




MIMO Multi-In-Multi-Out



Internet from Any Outlet

The AV1300 Gigabit Passthrough Powerline Starter Kit brings internet to any area with a power outlet using your home's electrical wiring.

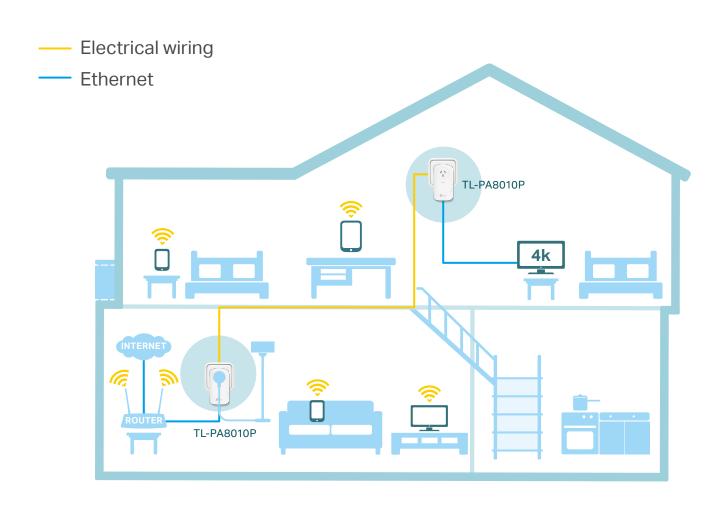

Features



Speed

- Ultra-fast Powerline Speed HomePlug AV2 standard compliant, high-speed data transfer rate of up to 1300Mbps, ideal for Ultra HD streaming and online gaming
- Gigabit Ports The Gigabit Ethernet ports allow your TVs, game consoles or PCs to connect to the internet at high speeds



Range

· 300-meter Range – Up to 300-meter range over the household power circuit



Reliability

 Mains Filter – Mains Filter inside the outlet reduces electrical noise interference and improves powerline communication performance



Ease of Use

- · Plug, pair and play Plug, pair and play, no configuration required
- No new wires No new wires, use existing electrical wiring to expand your home network
- Keep your outlet An integrated socket lets you power regular devices as normal, and a built-in noise filter prevents them from interrupting the powerline signal.
- TP-Link tpPLC Allows you to easily manage your network using the tpPLC Utility



Security

 Pair Button – 128-bit AES encryption easily at a push of "Pair" button



Energy Saving


 Power Saving – Power Saving Mode helps reducing power consumption by up to 85%

Specifications

Hardware

- · Plug Type: AU
- · Standards and Protocols: HomePlug AV2, HomePlug AV, IEEE 1901, IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- · Power Consumption: Maximum: 4.9W Typical: 4.6W
- · Range: 300 meters over electrical circuit
- · Interface: Gigabit Ethernet Port, Power Socket
- · Button: Pair Button
- · LED Indicator: Power, Powerline, Ethernet
- · Dimensions (W x D x H): 5.2 x 2.8 x 1.7 in. (131 x 71x 42 mm)

Standby: 0.5W

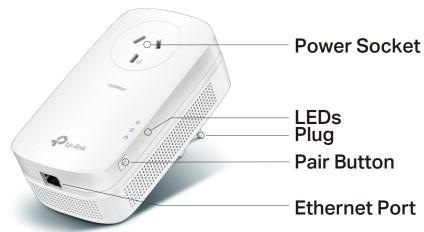



For more information, please visit

http://www.tp-link.com.au/products/details/TL-PA8010P-KIT.html
or scan the QR code left

- * Compatible with all HomePlug AV & AV2 Standard Powerline adapters.
- * Listed HomePlug AV2 speeds refer to the theoretical maximum physical-layer data transfer rate. Actual data speeds vary and are influenced by the home's electrical/physical environment, and if adapters are placed on the same home circuit.

 Specifications are subject to change without notice. TP-Link Technologies Co., Ltd. Other brands and product names are trademarks of their respective holders. Copyright ©2017 TP-Link Technologies Co., Ltd. All rights reserved.

Software

- · Modulation Technology: OFDM (PLC)
- · Encryption: Powerline Security: 128-bit AES

Others

- · Certification: CE, RoHS
- · Package Contents:

Powerline Ethernet Adapter
2-meter Ethernet cable (RJ45)
Quick Installation Guide

· System Requirements:

Windows 2000/XP/2003/Vista, Windows 7/8/8.1/10, Mac, Linux

· System Requirements for tpPLC Utility:

Windows XP/Vista/7/8/8.1/10 and Mac OS X (10.7 or later)

· Environment:

Operating Temperature: 0°C~40°C (32°F~104°F)

Storage Temperature: -40°C~70°C (-40°F~158°F)

Operating Humidity: 10%~90% non-condensing

Storage Humidity: 5%~90% non-condensing