

- Frosted Dome
- No UV emission
- Slim and elegant heatsink design
- Free of mercury and heavy metal to protect environment
- B22 lamp base
- High Lumen output, equivalent to 100W incandescent bulb (1700lm)
- High efficacy (>100lm/W)
- Lifetime of 15,000 hrs
- Triac dimmable (with Leading/Universal/Trailing



Order Code 65263

General Data

Lamp Socket B22
Design Frosted Dome

Geometric Data

Length (mm) 134.00
Diameter (mm) 60.00
Weight (g) 160




Electric Data

Wattage 15 W
Voltage 220-240 V AC
Power Factor ≥ 0.50
Operating Frequency 50/60 Hz

Photometric Data

Luminous Flux (lm) 1700
CRI ≥ 80
CCT 6500 K – daylight
Luminous Intensity (cd) 210
Beam Angle (°) 220°
Lifetime 15,000 hrs

Equivalent to (W)

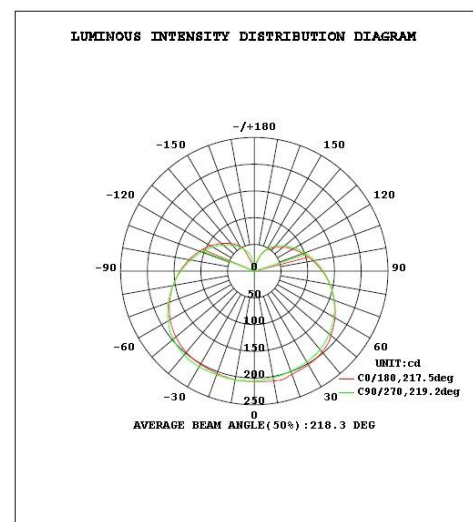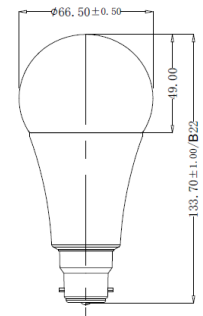



Order Code	65263
Product Description	Verbatim LED Classic-A B22 15W 6500K Daylight 1700LM 220-240V Dimmable

Technical Packaging Details

Giftbox Barcode	6943760252637
Inner Carton Barcode	N.A.
Outer Carton Barcode	26943760252631
Pack Dimensions (HxWxL)	150 mm x 72 mm x 72 mm
Pack Weight	195g
Carton Qty (Shipping Unit)	10
Carton Dimensions (HxWxL)	160 mm x 156 mm x 375 mm
Cartons/Layer	11
Layers/Pallet	5
Units/Pallet	550