



- Integrated Floodlight for metal halide lamp replacement
- Metal cabinet for better thermal management and longer lifespan
- Outdoor use only
- IP65 water-proof
- IK07 impact proof
- 100° beam angle
- 6500K CCT Daylight
- Lifetime of 15,000 hrs



Order Code	65457
General Data	
Lamp Socket	Integrated Fixture
Design	PC diffuser
Geometric Data	
Length (mm)	220mm
Width (mm)	167mm
Weight (g)	638g
Electric Data	
Wattage	30 W
Voltage	220-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz
Photometric Data	
Luminous Flux (lm)	2400
CRI	≥80
CCT	6500 K – Daylight
Luminous Intensity (cd)	1050Cd
Beam Angle (°)	100°
Lifetime	15,000 hrs

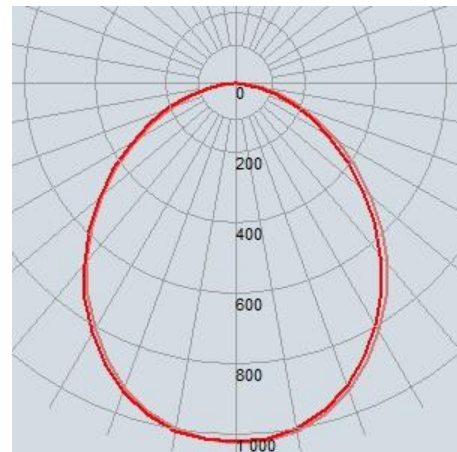

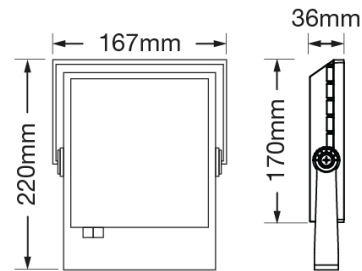

Order Code	65457
Product Description	Verbatim LED Floodlight 30W 2400lm 6500K Daylight 220-240V

Technical Packaging Details

Giftbox Barcode	6943760254570
Inner Carton Barcode	16943760254577
Outer Carton Barcode	26943760254574
Pack Dimensions (LxWxH)	226mm x 171mm x 47mm
Pack Weight	720g
Carton Qty (Shipping Unit)	12
Carton Dimensions (LxWxH)	348mm x 229mm x 233mm
Cartons/Layer	9
Layers/Pallet	3
Units/Pallet	324