



- Integrated Floodlight for metal halide lamp replacement
- Metal cabinet for better thermal management and longer lifespan
- Outdoor use only
- IP65 water-proof
- IK07 impact proof
- 100° beam angle
- 3000K CCT Warm-white
- Lifetime of 15,000 hrs



| | |
|-------------------------|---------------------|
| Order Code | 65458 |
| General Data | |
| Lamp Socket | Integrated Fixture |
| Design | PC diffuser |
| Geometric Data | |
| Length (mm) | 301mm |
| Width (mm) | 220mm |
| Weight (g) | 1008g |
| Electric Data | |
| Wattage | 50 W |
| Voltage | 220-240 V AC |
| Power Factor | ≥0.9 |
| Operating Frequency | 50/60 Hz |
| Photometric Data | |
| Luminous Flux (lm) | 3600 |
| CRI | ≥80 |
| CCT | 3000 K – Warm White |
| Luminous Intensity (cd) | 1600Cd |
| Beam Angle (°) | 100° |
| Lifetime | 15,000 hrs |

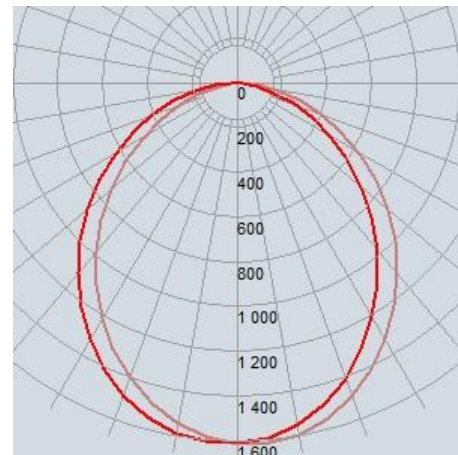

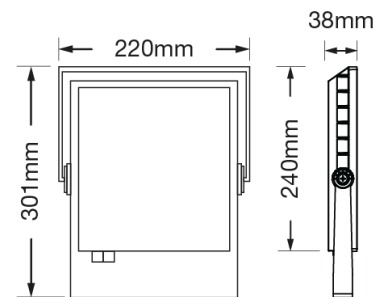

| | |
|----------------------------|---|
| Order Code | 65458 |
| Product Description | Verbatim LED Floodlight 50W 3600lm 3000K Warm White 220-240V |

Technical Packaging Details

| | |
|----------------------------|-----------------------|
| Giftbox Barcode | 6943760254587 |
| Inner Carton Barcode | 16943760254584 |
| Outer Carton Barcode | 26943760254581 |
| Pack Dimensions (LxWxH) | 308mm x 226mm x 50mm |
| Pack Weight | 1150g |
| Carton Qty (Shipping Unit) | 6 |
| Carton Dimensions (LxWxH) | 317mm x 230mm x 315mm |
| Cartons/Layer | 14 |
| Layers/Pallet | 2 |
| Units/Pallet | 168 |