




- Replace 28W fluorescent T5 tube and fixture
- Translucent end-cap for Seamless cascade connection
- Electrical double insulated safety construction
- >85 lm/W
- 120° beam angle
- 6500K CCT Daylight
- Lifetime of 25,000 hrs
- Indoor use only

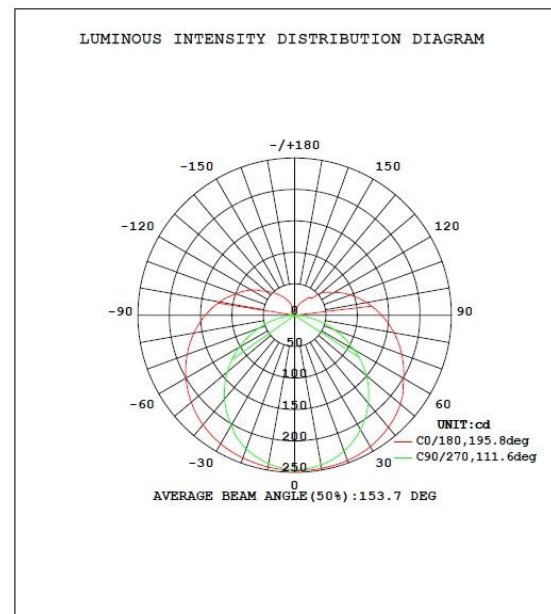

Order Code	65513
<b>General Data</b>	
Lamp Socket	Integrated Fixture
Design	PC diffuser
<b>Geometric Data</b>	
Length (mm)	1168mm
Width (mm)	22mm
Weight (g)	152g
<b>Electric Data</b>	
Wattage	14 W
Voltage	220-240 V AC
Power Factor	≥0.5
Operating Frequency	50/60 Hz
<b>Photometric Data</b>	
Luminous Flux (lm)	1300
CRI	≥80
CCT	6500 K – Daylight
Luminous Intensity (cd)	250
Beam Angle (°)	120°
Lifetime	25,000 hrs

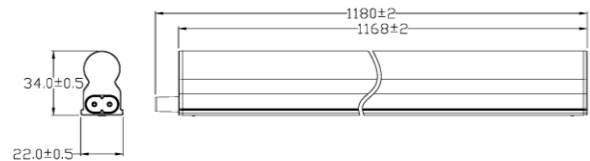

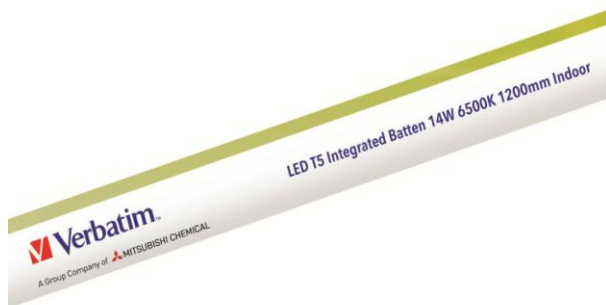

<b>Order Code</b>	65513
<b>Product Description</b>	Verbatim LED T5 Indoor Integrated Batten 14W 1200mm 6500K Daylight 1300lm Indoor 220-240V

<b>Technical Packaging Details</b>	
Giftbox Barcode	6943760255133
Inner Carton Barcode	16943760255130
Outer Carton Barcode	26943760255137
Pack Dimensions (LxWxH)	1218mm x 24mm x 36mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	25
Carton Dimensions (LxWxH)	1296mm x 200mm x 140mm
Cartons/Layer	TBC
Layers/Pallet	TBC
Units/Pallet	TBC