

- Integrated Floodlight for metal halide lamp replacement
- Metal cabinet for better thermal management and longer lifespan
- IP65 water-proof
- IK07 impact proof
- 1.8-2.5 metre suggested installation height
- 7-10 metre sensor detection range (120° detection angle)
- No fixture activation during day time (background environment brightness > 30lux)
- 60 seconds fixture activation on each motion detected
- Lifetime of 15,000 hrs



Order Code 65639

General Data

Lamp Socket	Integrated Fixture
Design	PC diffuser with motion sensor

Geometric Data



Length (mm)	137mm
Width (mm)	117mm
Weight (g)	300g

Electric Data

Wattage	10 W
Voltage	220-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz

Photometric Data

Luminous Flux (lm)	800
CRI	≥80
CCT	5000 K – daylight
Luminous Intensity (cd)	400Cd
Beam Angle (°)	100°
Lifetime	15,000 hrs

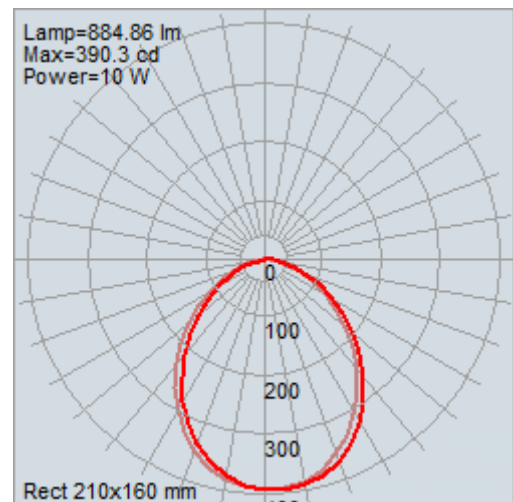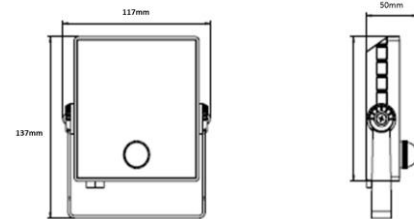



Order Code	65639
Product Description	Verbatim Sensor LED Floodlight 10W 800lm 5000K Daylight 220-240V with Australia plug

Technical Packaging Details

Giftbox Barcode	6943760256390
Inner Carton Barcode	16943760256397
Outer Carton Barcode	26943760256394
Pack Dimensions (LxWxH)	188mm x 127mm x 47mm
Pack Weight	520g
Carton Qty (Shipping Unit)	12
Carton Dimensions (LxWxH)	TBC
Cartons/Layer	TBC
Layers/Pallet	TBC
Units/Pallet	TBC