


- PMMA Light Guide Plate employed, stay clear after years' of installation
- Lifetime of 40,000 hrs
- 4000K CCT Cool White
- 110° beam angle
- DALI driver options available
- Surface mount and suspended installation accessories available



Order Code	65822
<b>General Data</b>	
Lamp Socket	NA
Design	PMMA Light Guide Plate
<b>Geometric Data</b>	
Length (mm)	595x295mm
Cut-hole (mm)	580x280mm
Weight (g)	1050g
<b>Electric Data</b>	
Wattage	18W
Input Current	3000mA
Voltage	45-60 V DC
Power Factor	≥0.9
Operating Frequency	DC
<b>Photometric Data</b>	
Total Luminous Flux (lm)	1500lm
90° cone Luminous Flux (lm)	N/A
CRI	≥80
CCT	4000 K – Cool White
Luminous Intensity (cd)	500Cd
Beam Angle (°)	110°
Lifetime	40,000 hrs



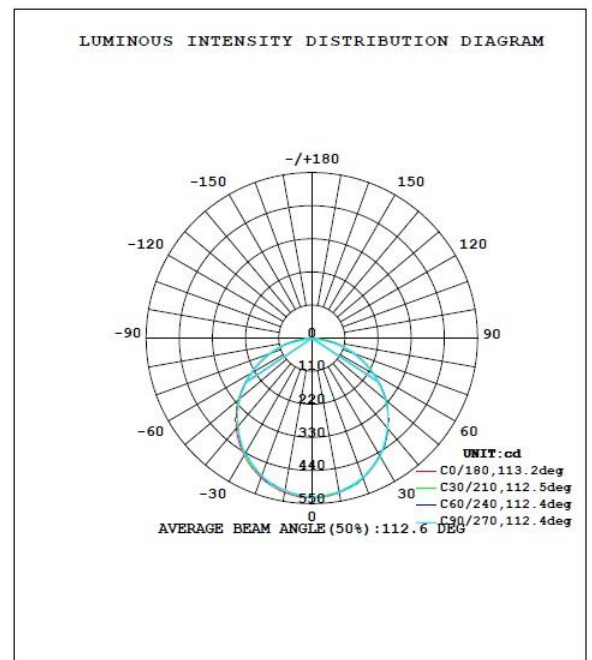

<b>Order Code</b>	65822
<b>Product Description</b>	Verbatim LED slim panel 595x295x11mm 18W 4000K Cool White 1500lm DC 45-60V 300mA

<b>Technical Packaging Details</b>	
Giftbox Barcode	6943760258226
Inner Carton Barcode	16943760258223
Outer Carton Barcode	26943760258220
Pack Dimensions (LxWxH)	618 mm x 355 mm x 34 mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	6
Carton Dimensions (LxWxH)	630 mm x 375 mm x 190 mm
Cartons/Layer	10
Layers/Pallet	2
Units/Pallet	120