



- PMMA Light Guide Plate employed, stay clear after years' of installation
- Ultra-slim, only 9mm thick
- Lifetime of 50,000 hrs
- 4000K CCT Cool White
- 110° beam angle
- 0-10V dimmable driver options available
- Surface mount and suspended installation accessories available



Order Code	66101
General Data	
Lamp Socket	NA
Design	PMMA Light Guide Plate
Geometric Data	
Length (mm)	1195x595x9 mm
Cut-hole (mm)	1180x580 mm
Weight (g)	TBC
Electric Data	
Wattage	48W
Input Current	1000mA
Voltage	37-48 V DC
Power Factor	≥0.9
Operating Frequency	DC
Photometric Data	
Total Luminous Flux (lm)	5000lm
90° cone Luminous Flux (lm)	N/A
CRI	≥80
CCT	4000 K – Cool White
Luminous Intensity (cd)	1800
Beam Angle (°)	110°
Lifetime	50,000 hrs

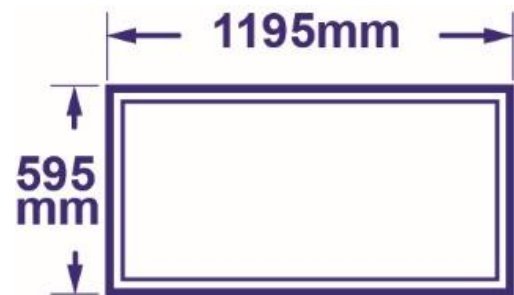

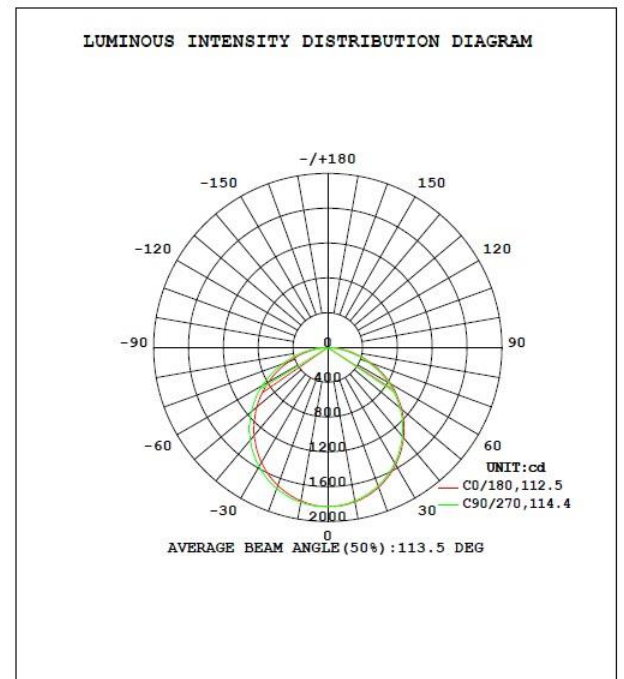

Order Code	66101
Product Description	Verbatim LED slim panel 1195x595x9 mm 48W 4000K Cool White 5000lm DC 37-48V 1000mA

Technical Packaging Details

Giftbox Barcode	6943760261011
Inner Carton Barcode	16943760261018
Outer Carton Barcode	26943760261015
Pack Dimensions (LxWxH)	1248 mm x 642 mm x 36 mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	4
Carton Dimensions (LxWxH)	1267 mm x 167 mm x 663 mm
Cartons/Layer	4
Layers/Pallet	2
Units/Pallet	20

Drivers to be ordered separately:

- LED driver 48W 1000mA 37-48V 0-10V dimmable
 - 66106(open wire) / 66107(with power plug)
- LED driver 48W 1000mA 37-48V non-dimmable
 - 66104(open wire) / 66105 (with power plug)

Accessories:

- Suspended installation kit (66012)



(155x63x33mm)